


DWG NO.
C-101452

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

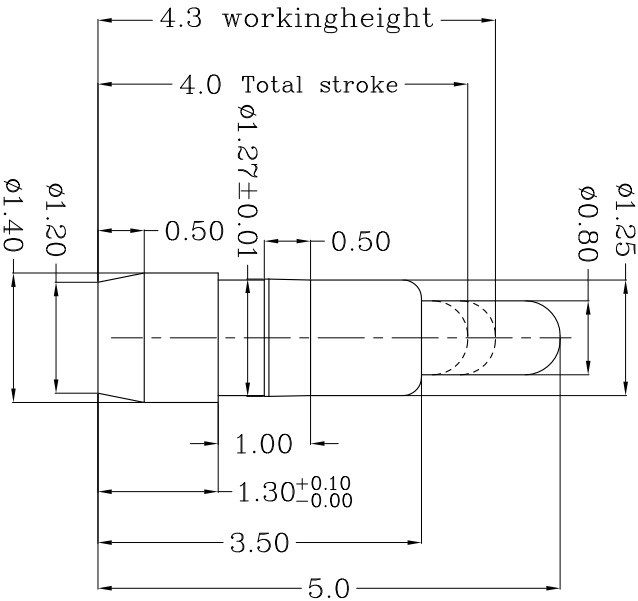

Notes:
△ Material(材质):

- 1)Body : Brass
 - 2)Plunge : Brass
 - 3)Spring :Stainless steel wire
- 2 Plating(镀):
- 1)Body Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀 20.1um Min 镍底1.4um Min)
 - 2)Plunge Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunge: 镀 金0.4um Min 镍底1.4um Min)
- 3 Mechanically(机械性能):
- 1)Force: 30±10gf per pin at 0.7mm stroke (力: 下压0.7mm 的力:30±10gf)
 - 2)Total stroke(总行程) : 1.00mm
 - 3)Durability(寿命): 10,000 cycle min.
- 4 Electrically(电性能)
- 1)Contact resistance(接触阻抗): 30mOhm Max.
 - 2)Voltage rating(额定电压): 36V DC Max
 - 3)Current rating(额定电流): 2.0A

TOP-LINK

USED ON

-

101452-1
PART NUMBER

MATL	△ 1	HT TR	FIN
DWN		APVD	
CHK		REL	

Top-Link
Electronics Ltd.

NAME
PGGD PIN
PG-1.4-1.3-1.25-3.5-5.0

SCALE	A4	DWG NO.	C-101452	SHEET 1 OF 1	REV 1
1:1					

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED
0 = ±
0.0 = ±0.10
0.00 = ±0.05
0.000 = ±
ANGLE: ±1°
SURF TEXTURE: 32/
REMOVE BURRS, BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

NEW	REVISION RECORD	APVD	DATE
			2010/09/07

LDC	DIST
-	-

4

3

2

1