
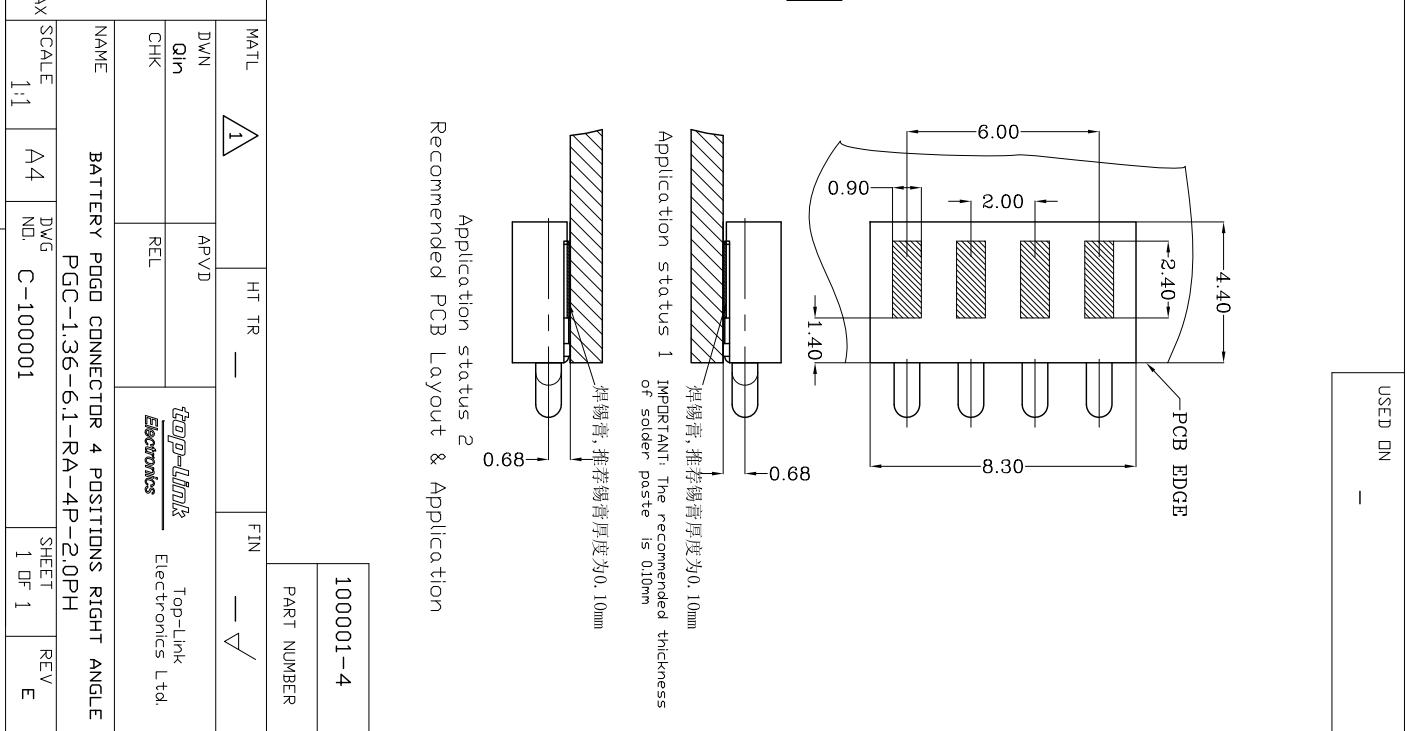
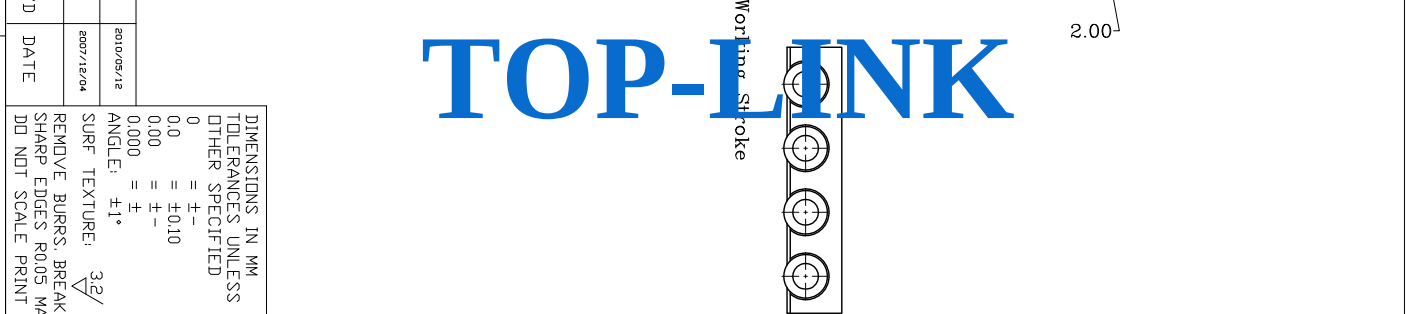


|      |   |
|------|---|
| LDC  | - |
| DIST | - |

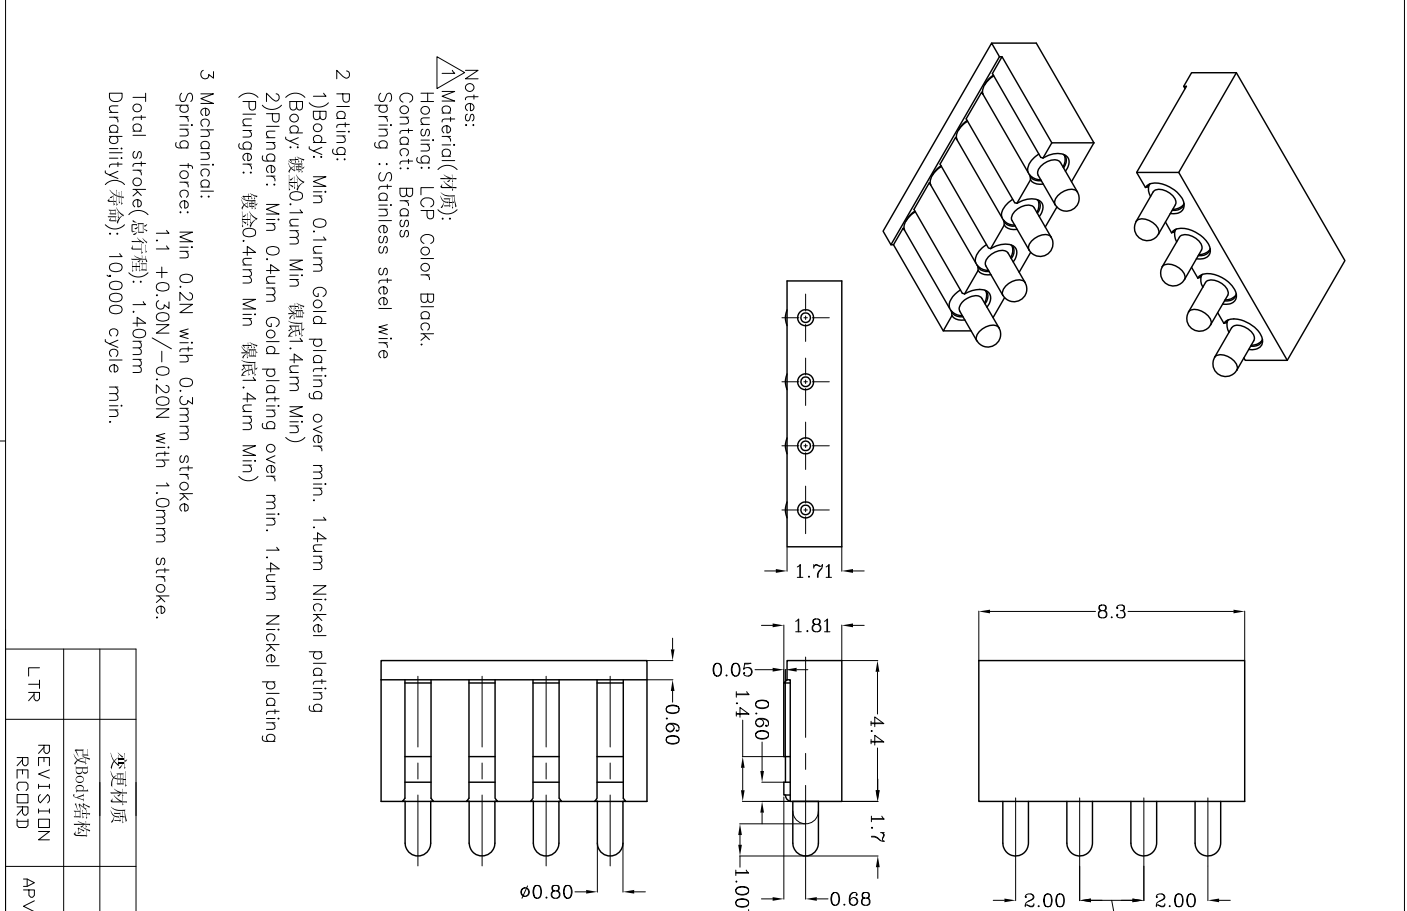

Notes:  
1)Material(材质):  
Housing: LCP Color Black.  
Contact: Brass  
Spring : Stainless steel wire

2 Plating:  
1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating  
(Body: 镀金0.1um Min 镍底1.4um Min)  
2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating  
(Plunger: 镀金0.4um Min 镍底1.4um Min)

3 Mechanical:  
Spring force: Min 0.2N with 0.3mm stroke  
1.1 +0.30N/-0.20N with 1.0mm stroke.  
Total stroke(总行程): 1.40mm  
Durability(寿命): 10,000 cycle min.


|      |                 |      |            |
|------|-----------------|------|------------|
| L TR | REVISION RECORD | APVD | DATE       |
|      | 变更材质            |      | 2010/05/12 |
|      | 改Body结构         |      | 2007/12/04 |

|                                                          |         |                  |              |
|----------------------------------------------------------|---------|------------------|--------------|
| DIMENSIONS IN MM<br>TOLERANCES UNLESS<br>OTHER SPECIFIED |         |                  |              |
| 0                                                        | = ± -   |                  |              |
| 0.0                                                      | = ±0.10 |                  |              |
| 0.00                                                     | = ± -   |                  |              |
| 0.000                                                    | = ±     |                  |              |
| ANGLE: ±1°                                               |         |                  |              |
| SURF TEXTURE: 32/                                        |         |                  |              |
| REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX                |         |                  |              |
| DO NOT SCALE PRINT                                       |         |                  |              |
| MATL                                                     | 1       | HT TR            | FIN          |
| DWN                                                      | APVD    |                  |              |
| CHK                                                      | REL     |                  |              |
| NAME BATTERY POGD CONNECTOR 4 POSITIONS RIGHT ANGLE      |         |                  |              |
| SCALE 1:1                                                | A4      | DWG NO. C-100001 | SHEET 1 OF 1 |
| PGC-1.36-6.1-RA-4P-2.0PH                                 |         |                  |              |
| Top-Link Electronics Ltd.                                |         |                  |              |

|             |
|-------------|
| 100001-4    |
| PART NUMBER |

Application status 2  
Recommended PCB Layout & Application

Application status 1  
IMPORTANT: The recommended thickness of solder paste is 0.10mm

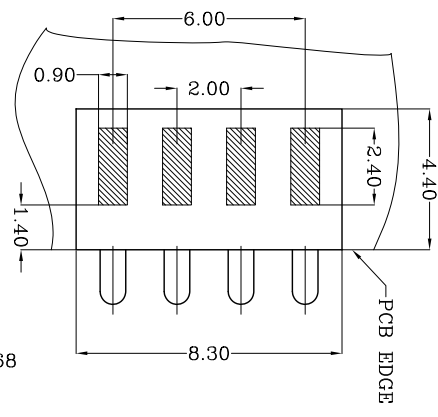

USED ON  
-