


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
C-100049

LDC
-
DIST
-

4

3

2

1

Notes:
△Material(材质):
Housing: LCP Color Black.
Contact: Brass
Spring :Stainless steel wire

2 Plating:




- 1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镀底1.4um Min)
2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镀底1.4um Min)

3 Mechanical:

- Spring force: Min 0.2N with 0.3mm stroke
1.1 +0.30N/-0.20N with 1.0mm stroke.
Total stroke(总行程): 1.40mm
Durability(寿命): 10,000 cycle min.




	变更材质		2010/05/12
	变更材料		2010/01/26
L TR	REVISION RECORD	APVD	DATE

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED			
0	= ± -		
0.0	= ±0.10		
0.00	= ± -		
0.000	= ±		
SURF TEXTURE: 32/ ANGLE: ±1°			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX DD NOT SCALE PRINT			
MATL	1	HT TR	FTN
DWN		APVD	
CHK		REL	
NAME BATTERY POGO CONNECTOR 4 POSITIONS RIGHT ANGLE			
SCALE 1:1	A4	DWG NO. C-100049	
PGC-1.36-6.6-RA-4P-2.0PH			
Top-Link Electronics Ltd.			
PART NUMBER			
100049-4			
SHEET 1 OF 1			
REV E			

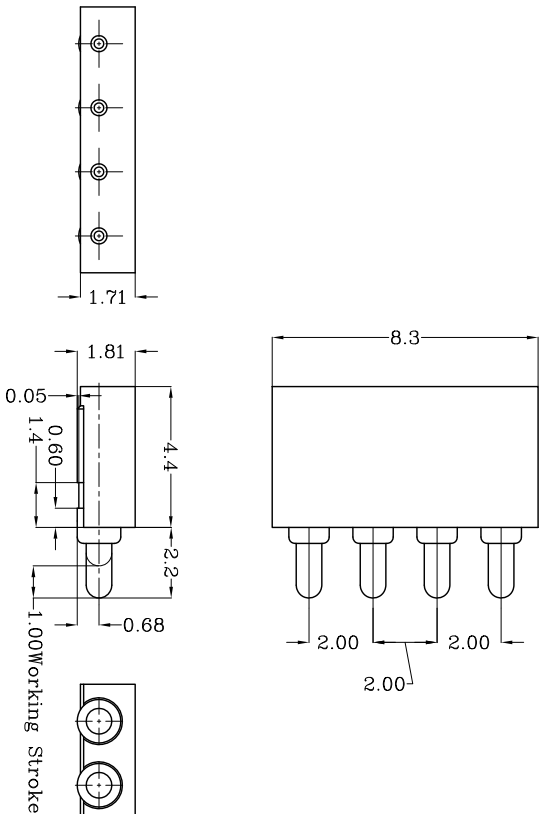

TOP-LINK

Application status 2
Recommended PCB Layout & Application

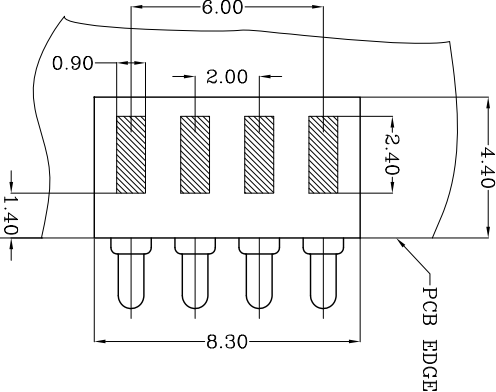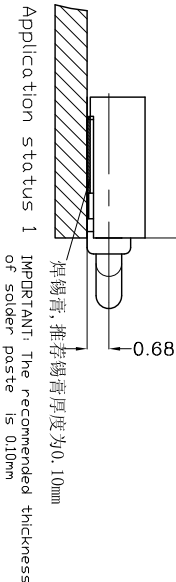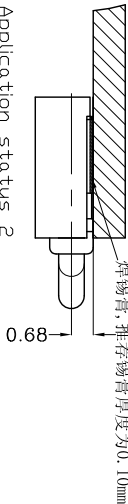

USED ON