
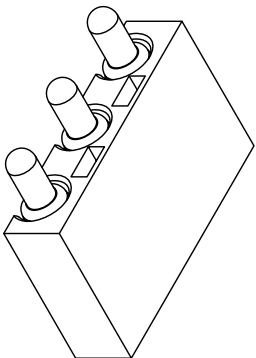
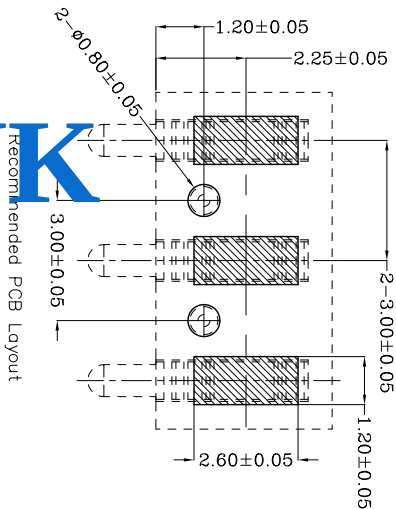



LDC	-
DIST	-

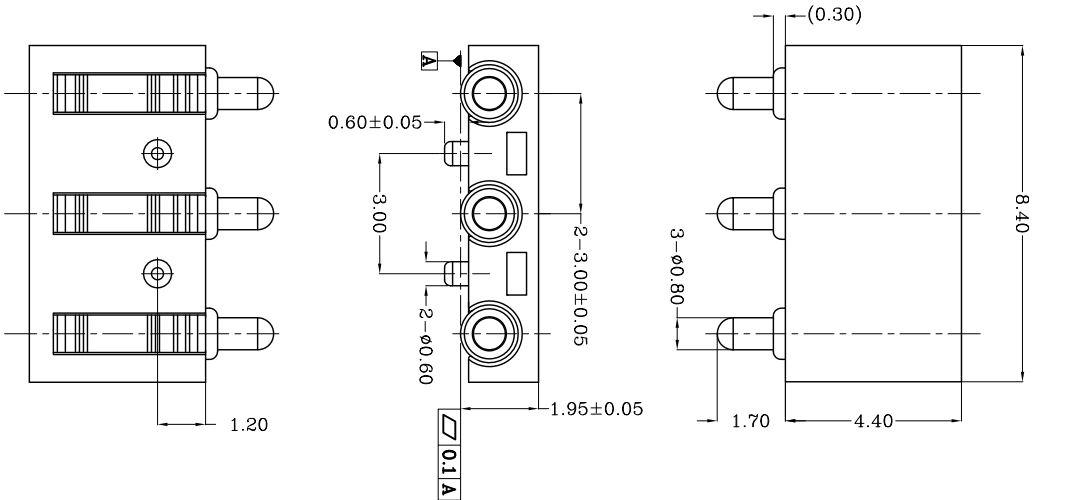

TOP-LINK

Notes:

1 Material(材质):

Housing: HTN, UL94 V-0 Color Black.

Contact: Brass

Spring :Stainless steel wire

2 Plating:

Body: Min 0.1um Gold plating over min. 1.4um Nickel plating

(Body: 镀金0.1um Min 镍底1.4um Min)

Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating

(Plunger: 镀金0.4um Min 镍底1.4um Min)

3 Mechanical:

Force:120±25gf per pin at 1.0mm stroke

(力:下压1.0mm的力:140±25gf)

Total stroke(总行程): 1.40mm

100574-3
PART NUMBER

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED

0 = ±
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±
ANGLE: ±1°

SURF TEXTURE: 32/
REMOVE BURRS, BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

MATL	HT TR	FIN	NAME	SCALE	DWG NO.	SHEET 1 OF 1	REV A
1	—	—	POGO CONNECTOR 3 POSITIONS RIGHT ANGLE PGC-144-6.1-RA-3P-30PH	1:1	A4	C-100574	A
DWN	APVD		Top-Link Electronics Ltd.				
CHK	REL						

USED ON

-