


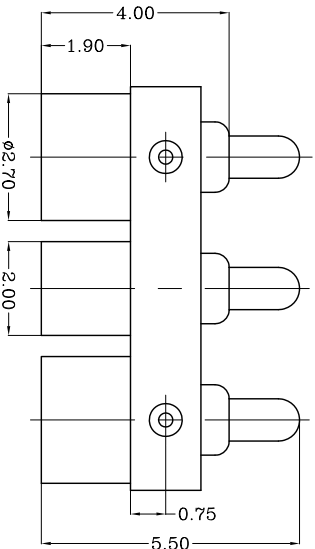

Mechanical:
Force: 130±30gf per pin at 1.0mm(力:1.0mm的力:130±30gf)
Total stroke(总行程): 1.40mm
Durability(寿命): 10,000 cycle min.
Electrical(电性能)
Contact resistance(接触抵抗): 30mOhm Max.
Voltage rating(额定电压): 36V DC Max
Current rating(额定电流): 2.0A

Spring :Stainless steel wire

2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
(Plunger: 鍍金0.4um Min 鍍底1.4um Min)

Durability(寿命): 10,000 cycle min.

Current rating(额定电流): 2.0A

100583-3
PART NUMBER