
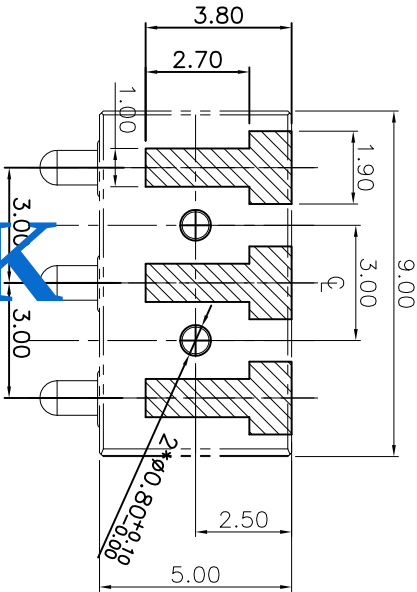
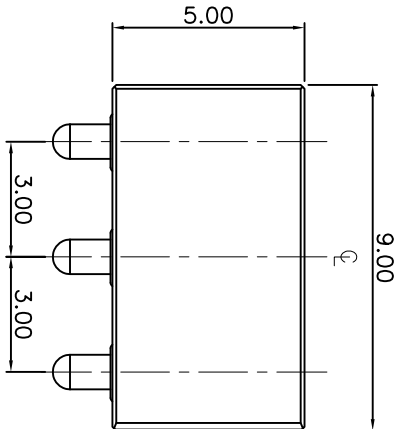

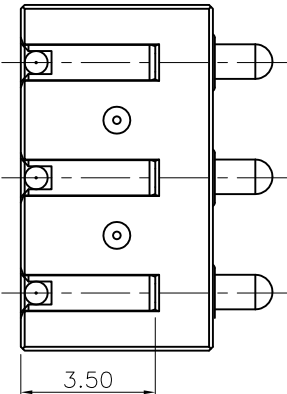
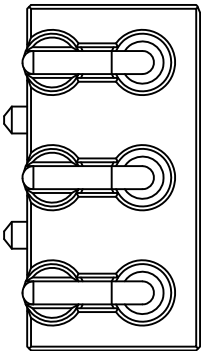
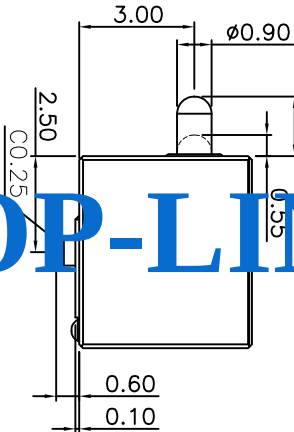


RECOMMENDED P.C.B. LAYOUT (Component Side)

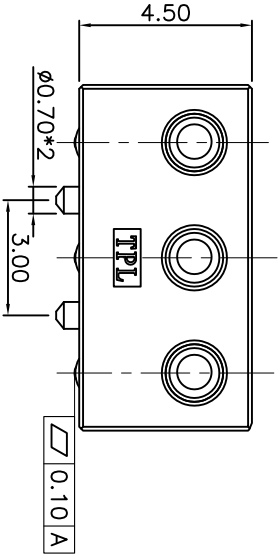

Notes:

- 1 Material, Housing: High temp. Plastic
Contact: Brass
Color Black.
- 2 Mechanical demands:
Plating Plunger: Min 0.4um Au over 1.4um Ni
Plating Body: Min 0.1um Au over 1.4um Ni .
- 3 Mechanical:
Total stroke: 1.50mm
Durability: 10,000 cycle min.
- 4 Electrical
Contact resistance: 30mOhm Max.
Voltage rating: 36V DC Max
Current rating: 2.0A

TOP-LINK

LDC	-
DIST	-

	变更焊接端子		11' / 01 / 13
	NEW		10' / 09 / 06
L TR	REVISION RECORD	APVD	DATE

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED
0 = ±
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±
ANGLE: ±1°
SURF TEXTURE: 32/
REMOVE BURRS, BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

MATL	—	HT TR	—	FTN	—
DWN	QIN	APVD			
CHK		REL			
NAME	PGGD 3P Connector PGC-1.5-5.55-RA-3P-3.0PH-3.0H	DWG NO.	C-100634	SHEET 1 OF 1	REV B
SCALE	4:1	A4			

Top-Link Electronics Ltd.

100634-3
PART NUMBER

USED ON