
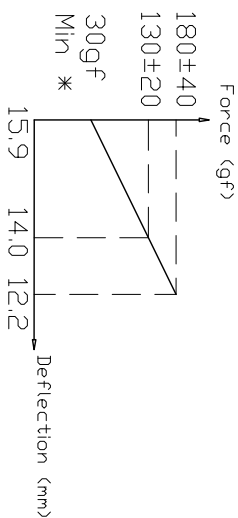


proposal

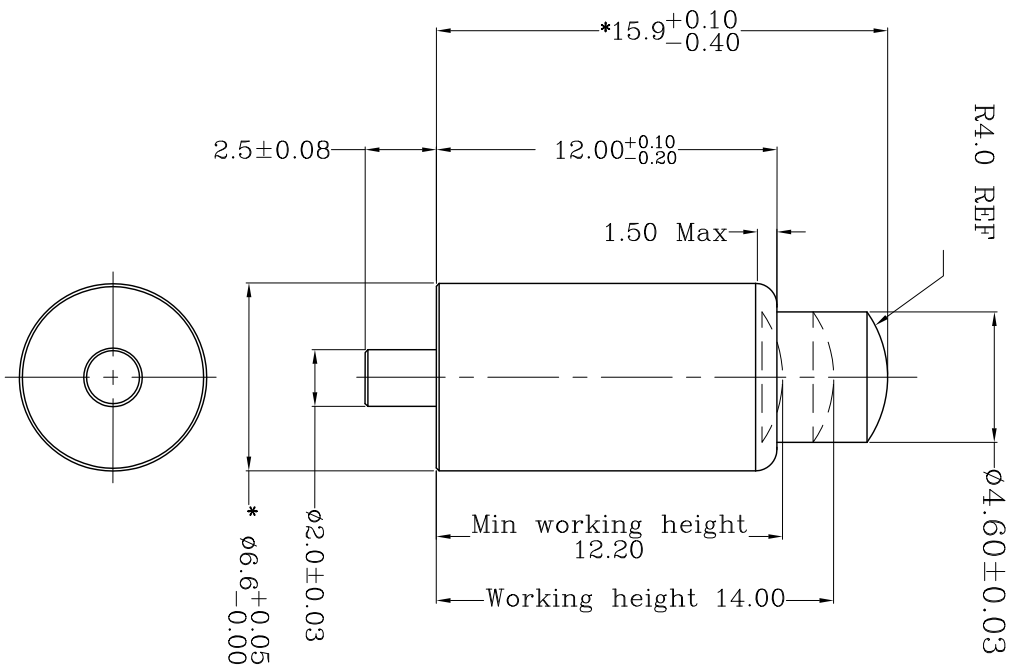

LINK

130±20

30gf

Min *

Deflection (mm)

15.9 14.0 12.2

1 Dimensions shall be interpreted per ASME Y14.5M.

2 Mechanical performance(See the table 1)

<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.

<2.2>Warning: Working height are not permitted to be less than 1100mm working height.

<2.3>Durability: 10,000 cycle min.

3 Electrical performance

Resistance: 30 mΩ Max.

Current rating: 2.0A

4 RoHS compliant.

Item	Part name	Qty/Ea	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.4um plating Ni 1.4um
3	Spring	1	Stainless steel wire	_____
4	Spring holder	1	LCP	_____
5				

Top-Link Electronics Ltd.	Type Customer drawing	Unit mm	Weight
------------------------------	--------------------------	------------	--------

TOLERANCES UNLESS OTHER SPECIFIED	DWN: Minos	APVD:	<i>top-Link</i> <i>Electronics</i> Top-Link Electronics Ltd
0		REL:	
0.0			
0.00			
0.005			

0.000=H—	
Angle: 41—	
SURF. TEXTURE:	
REMOVE BURRS,	
POGO PIN	Name

BREAK R0.05 SCALE	EDGES NOT	Scale 1:1	Size A4	DWG No. C-20101010984	Page 1/1	Rev. 2
-------------------------	--------------	--------------	------------	--------------------------	-------------	-----------