
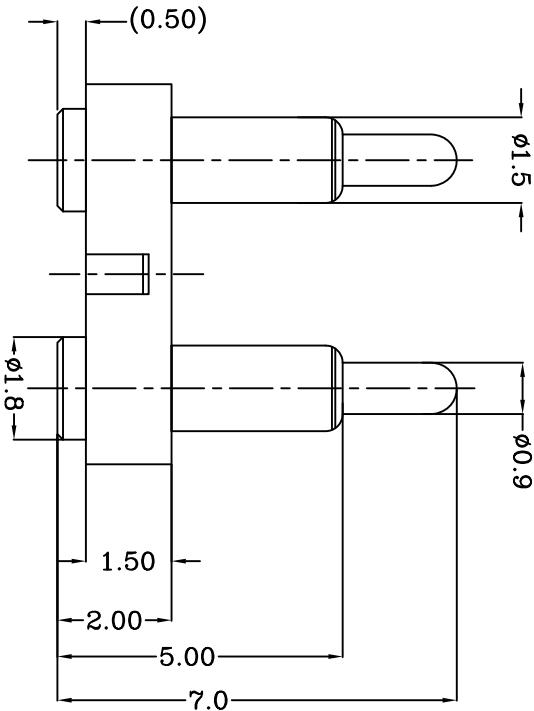
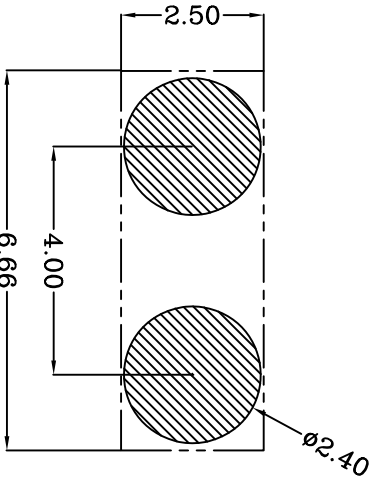
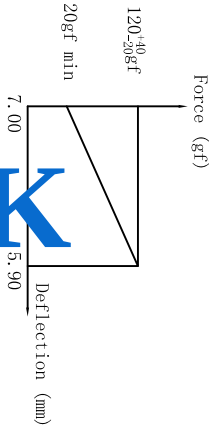


DWG NO.
C-100052

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

LOC	-
DIST	-

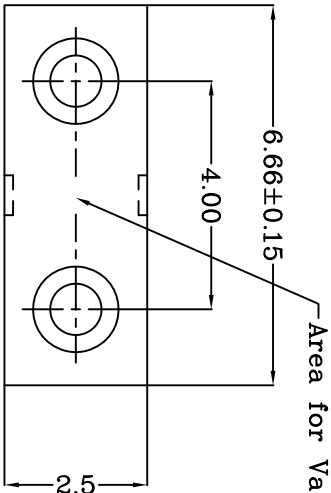

TOP-LINK

- Notes:
- 1 Material, Housing: PA 4,6 (30% Glass Filled)
Color Black.
 - 2 Mechanical demands:
Plating Plunger: Au plating over Ni plating
Plating Body: Au plating over Ni plating
 - 3 Mechanical
1) Total stroke : 2.0mm
2) Durability: 10,000 cycle min.
 - 4 Electrical
1) Contact resistance: 30mOhm Max.
2) Operating voltage: 36VDC MAX.
 - 5 Packing: Reel Tape

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED

0	= ± .05
0.0	= ± 0.15
0.00	= ± 0.10
0.000	= ± .005

ANGLE: ± 1°

SURF TEXTURE: 3.2/

REMOVE BURRS
SHARP EDGES NO.05 MAX
DO NOT SCALE PRINT

MATL	HT TR	FIN	PART NUMBER
DWV	AMPD	—	100052-2
Qin	Lansing	—	PART NUMBER
CHK	REL	—	Top-link Electronics Ltd.
Jin	REL	—	Top-link Electronics Ltd.
NAME	BATTERY POGO CONNECTOR 2 POSITIONS	—	—
SCALE	1:1	A4	REV 2
NO.	PGC-1.5-7.0-R-2P-4.0PH	C-100052	SHEET 1 OF 1