
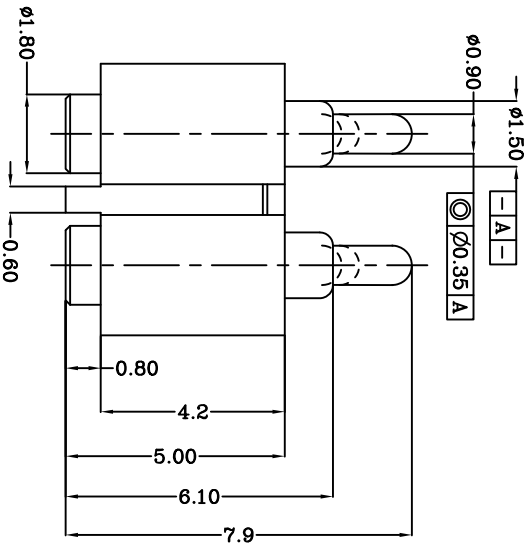
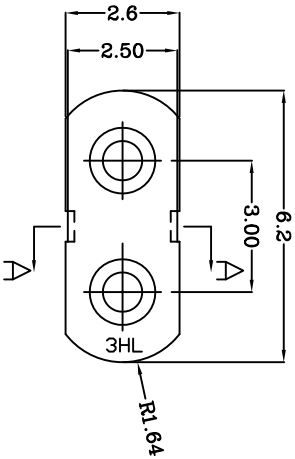

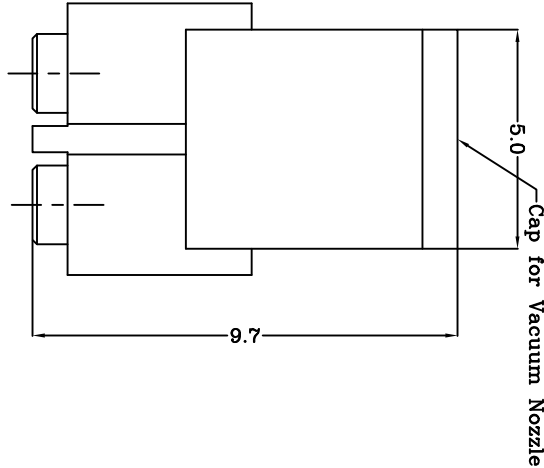


TOP-LINK

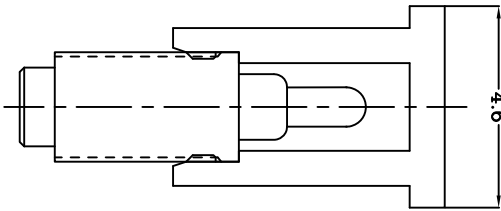

Item	Part name	Q'ty/Ea'	Material	Finish
1	HSG	1	High temp.Plastic UL94 V-0 Color Black	_____
2	Body	2	Leaded Brass	Gold plating over Nickel plating
3	Plunger	2	Leaded Brass	Gold plating over Nickel plating
4	Spring	2	Stainless steel wire	_____
5	CAP	1	High temp.Plastic UL94 V-0 Color Black	_____

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
- <2.2>Warning: Working height are not permitted to be less than Min working height.
- 3 Electrical performance
Resistance: 30mOhm Max.
Current rating: 2.0A
- 4 Packaging specification conforms to EIA 481
- 5 RoHS compliant.

Table 1 Mechanical performance

working height	6.70mm	100gf Min <2.1>
Durability	10000cycle	

100063-2

PART NUMBER

Top-Link Electronics Ltd.		Type	Unit	Weight	
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	Customer drawing	mm	
0.0 = ±0.15		Cai wanlu	APVD:	<u>Topo-Link</u> Electronics	
0.00 = ±0.10		CHK:	REL:	Top-Link Electronics Ltd.	
0.000 = ±0.005		Name			
Angle: ±1°		Pogo pin connector			
SURF. TEXTURE:					
REMOVE BURRS:					
BREAK SHARP EDGES					
R0.05 MAX.DO NOT SCALE PRINT.		Scale	Size	DWG No.	
		1:1	A4	C-100063	Page 1/1
					Rev. B1

DIST

DIST