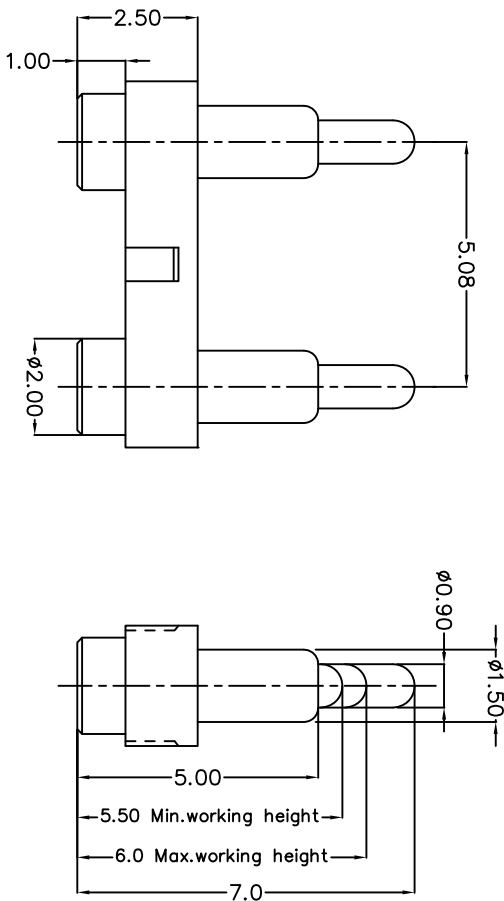
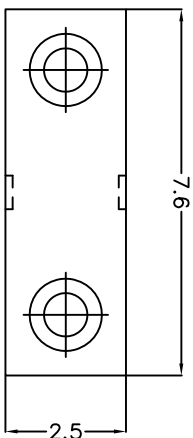
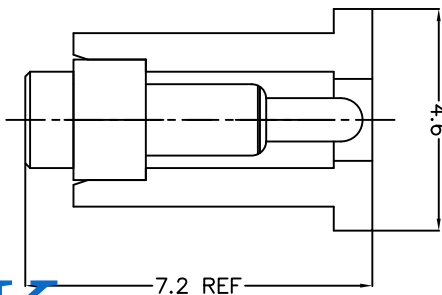


Table 1 Mechanical performance

Max. working height	6.00mm	115±25gf <2.1>
Min. working height	5.50mm	157±50gf
Durability	10000cycle	

1 Dimensions shall be interpreted per ASME Y14.5M.

- 1>The force is the average of forces obtained when plunger

<2.2>Warning: Working height are not permitted to be less

3 Electrical performance

Resistance: 30mOhm Max.Current rating: 2.0A

5 RoHS compliant.

Item	Part name	Q'ty/Eo'	Material	Finish
1	HSG	1	High temp Plastic UL94 V-0 Color Black	_____
2	Body	2	Leaded Brass	Gold plating over Nickel plating
3	Plinger	2	Leaded Brass	Gold plating over Nickel plating
4	Spring	2	Stainless steel wire	_____
5				

Top-Link Electronics Ltd TOLERANCES UNLESS OTHER SPECIFIED 0.0 = $\pm$ 0.15 0.00 = $\pm$ 0.10 0.000 = $\pm$ _ Angle: $\pm$ 1 SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX.D0 NOT SCALE PRINT.	Type	Customer drawing	Unit	mm			Weight
	DWG:	Qin Zuozhong	APVD:	Top-Link Electronics Top-Link Electronics Ltd			
	CHK:		REL:				
	Name	Customer drawing					
	Scale	Size	DWG No.	Page		Rev.	
1:1	A4	C-100120	1/1		B		