
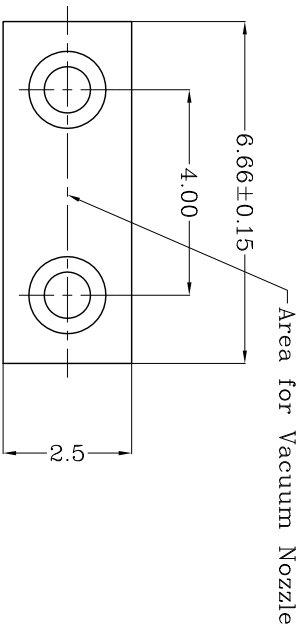




Recommended solder patse thickness is 0.10 mm
Recommended PCB Layout

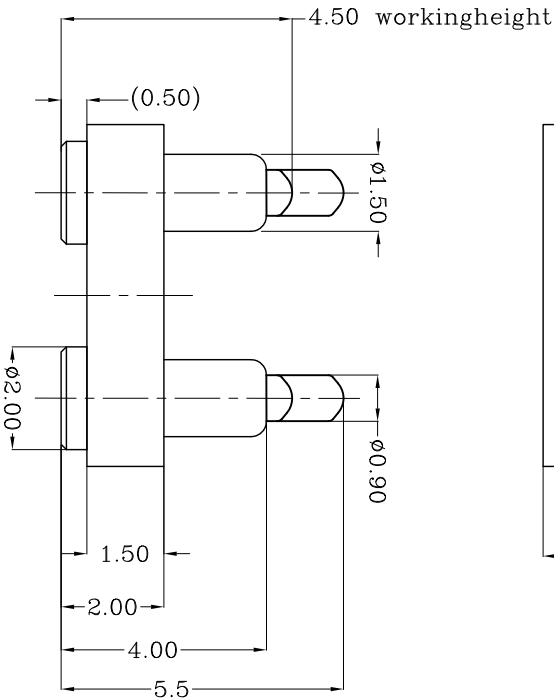

Notes:

1)Material(材质):
Housing: PA 46 (30% Glass Filled) Color Black.
Contact: Brass
Spring :Stainless steel wire

2 Plating:
1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
(Body: 镀金0.1um Min 镍底1.4um Min)
2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
(Plunger: 镀金0.4um Min 镍底1.4um Min)

TOP-LINK

USED ON

-

100155-2

PART NUMBER

MATL	HT TR	FIN
1	-	-

DWN	APVD	top-link Electronics Top-Link Electronics Ltd.
Qin		
CHK	REL	

NAME	PGGD	CONNECTOR	2 POSITIONS
SCALE	A4	DWG NO.	C-100155

1:1	A4	1 OF 1	REV A
-----	----	--------	-------

DIMENSIONS IN MM	TOLERANCES UNLESS OTHER SPECIFIED
0	= ±
0.0	= ±0.15
0.00	= ±0.10
0.000	= ±
ANGLE: ±1°	
SURF TEXTURE: 32/	
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX	
DO NOT SCALE PRINT	

	update remark		2007/12/26
LTR	REVISION RECORD	APVD	DATE

LDC	DIST
-	-

4

3

2

1