
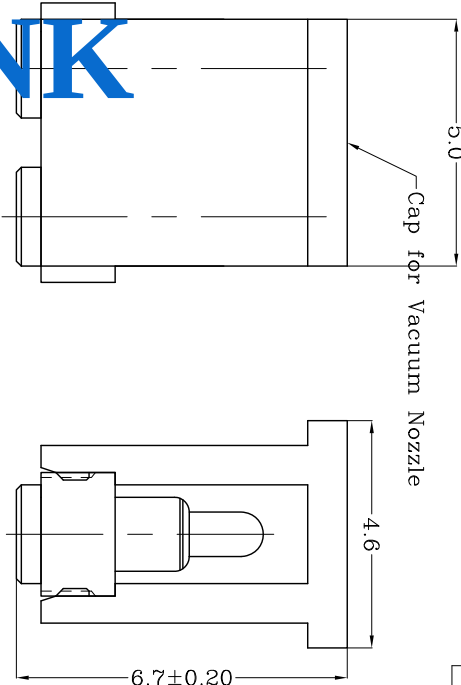
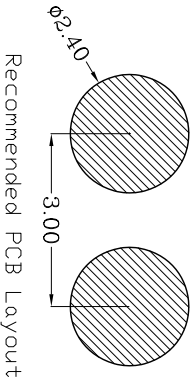
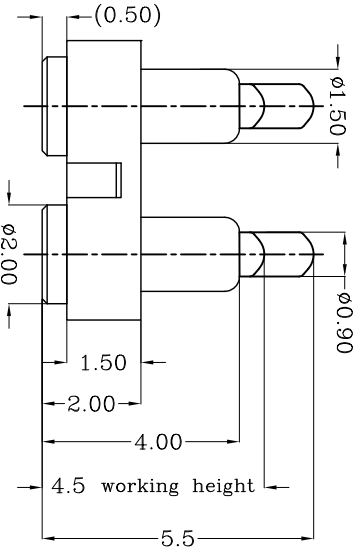


DWG NO.
C-100159

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

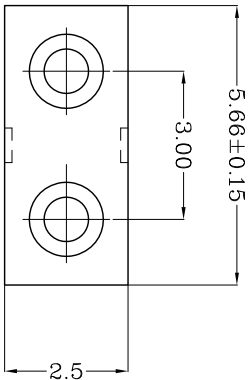

Notes:
1) Material: PA4.6 + 30% Glass fiber; UL94 V-0 Color Black.
Housing: PA4.6 + 30% Glass fiber; UL94 V-0 Color Black.
Contact: Brass
Spring : Stainless steel wire

2 Plating:
1) Body: 0.1um Gold plating over min. 1.4um Nickel plating (Body: Min 0.4um Min 镍底1.4um Min)
2) Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镍底1.4um Min)

3 Mechanical:
Total stroke(总行程): 1.40mm
Durability(寿命): 10,000 cycle min.

4 Electrical(电性能)
Contact resistance(接触阻抗): 30mOhm Max.
Voltage rating(额定电压): 36V DC Max
Current rating(额定电流): 2.0A

LDC	-
DIST	-

LTR	NEW	REVISION RECORD	APVD	DATE
2008/10/31				

DIMENSIONS IN MM			
TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±		
0.0	= ±0.15		
0.00	= ±0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
NAME	SCALE	DWG	NO.
POGO CONNECTOR 2 POSITIONS	1:1	A4	ND.
PGC-1S-5S-R-2P-3.0PH			
C-100159			

MATL	HT	TR	FIN
DWN	APVD	REL	FIN
CHK	REL	REL	FIN

100159-2	PART NUMBER
----------	-------------