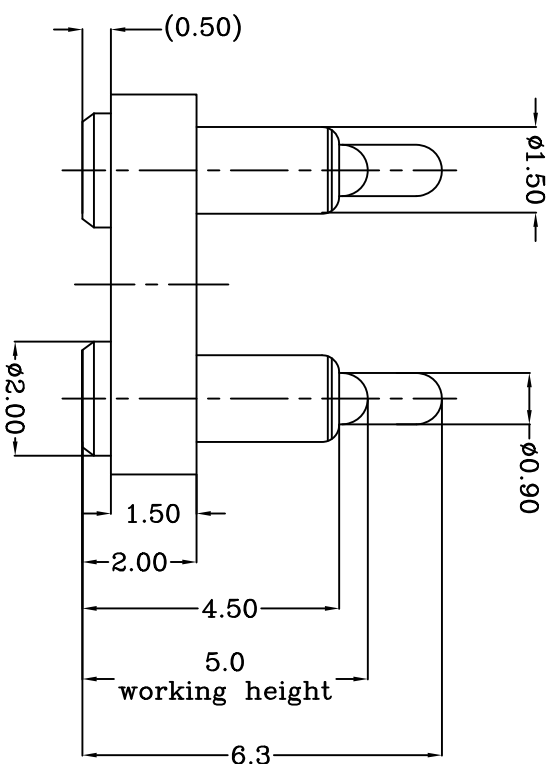
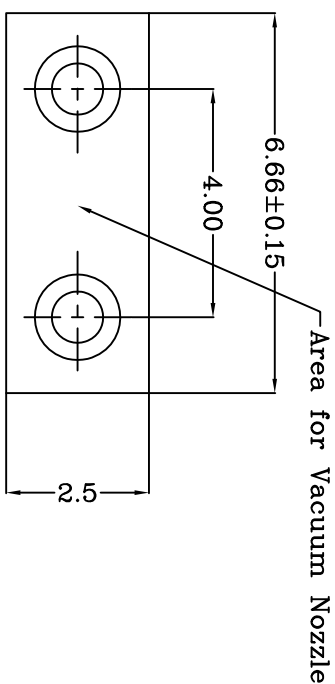


Recommended PCB Layout

Notes:

1 Material, Housing: PA 4,6 (30% Glass Filled)
Color Black.

Contact: Brass

2 Mechanical demands:

Plating Plunger: Min. 0.4 μ m Au over 1.25 μ m Ni.
Plating Body: Min. 0.1 μ m Au over 1.25 μ m Ni.

3 Mechanics

1) Force: 90gf min per pin at 1.3mm stroke

2) Total stroke : 1.60mm

3)Durability: 10,000 cycle min.

100203-2	PART NUMBER
----------	-------------

LDC	-
DIST	-

	取消倒角		2007/12/04
LTR	REVISION RECORD	APVD	DATE

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED				
0	= ±			
0.0	= ±0.15			
0.00	= ±0.10			
0.000	= ±			
ANGLE: ±1°				
SURF TEXTURE: 32/				
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX				
DO NOT SCALE PRINT				
MATL		HT TR	—	FIN
DWN	APVD	Top-Link Electronics		
Benny	Lansing	Top-Link Electronics Ltd.		
CHK	REL			
Andy				
NAME BATTERY POGO CONNECTOR 2 POSITIONS				
PGC-1.5-6.3-R-2P-4.0PH				
SCALE	A4	DWG	SHEET	REV
1:1		C-100203	1 OF 1	B

USED ON
1