
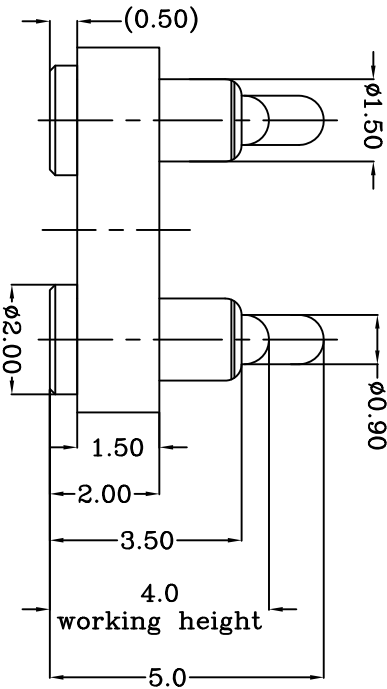
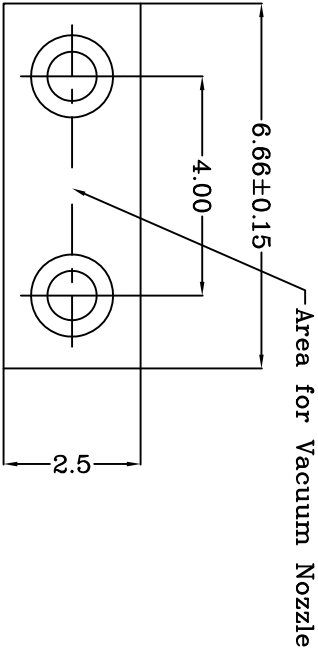



Recommended solder patse thickness is 0.10 mm
Recommended PCB Layout

TOP-LINK

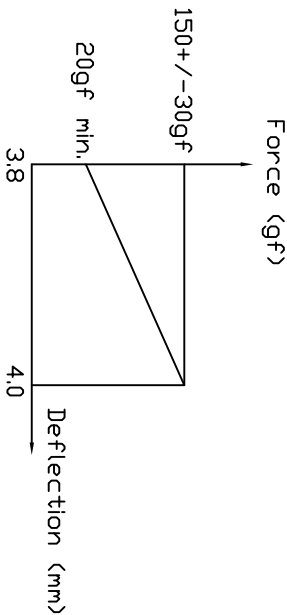

- Notes:
- 1 Material, Housing: PA 4,6 (30% Glass Filled)
Color Black.
 - 2 Mechanical demands:
Contact: Brass
Plating Plunger: 0.4µm Au over 1.4µm Ni
Plating Body: 0.1µm Au over 1.4µm Ni.

USED ON

-

LDC	-
DIST	-

update remark	2007/12/26
REVISION	
RECORD	
APVD	
DATE	

DIMENSIONS IN MM			
TOLERANCES UNLESS			
OTHER SPECIFIED			
0	= ±		
0.0	= ±0.15		
0.00	= ±0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK			
SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
MATL	△	HT TR	—
DWN		APVD	
Benny		Lansing	
CHK		REL	
Andy			
NAME	BATTERY POGO CONNECTOR 2 POSITIONS		
SCALE	1:1	A4	
ND	C-100219		
FIN	—		
100219-2			
PART NUMBER			
Top-Link Electronics Ltd.			

4

3

2

1