


DWG NO.
C-100244



DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED		MATL	HT TR	FIN
0 = ±	APVD		—	
0.0 = ±0.15	qin			
0.00 = ±0.10	CHK			
0.000 = ±	REL	<i>Top-Link Electronics</i>		
ANGLE: ±1°				
SURF TEXTURE: 32/	NAME POGO CONNECTOR 2 POSITIONS			
REMOVE BURRS, BREAK SHARP EDGES P0.05 MAX	PGC-1.5-6.3-R-2P-2.54PH			
DO NOT SCALE PRINT	SCALE	A4	DWG NO. C-100244	SHEET 1 OF 2
	1:1			REV B

2 Mechanical demands:
 Spring force: 105 ± 25 g with 1.0mm stroke.
 Full stroke: 1.5mm
 Plating Plunger: Min. 0.4um Au over 1.4um Ni
 Plating Body: Min. 0.1um Au over 1.4um Ni.



TOP-LINK

Recommended PCB Layout

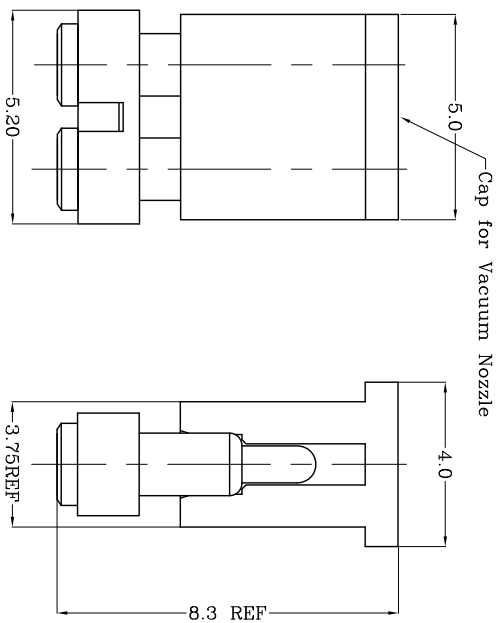

100244-2
PART NUMBER

USED ON	—
---------	---