

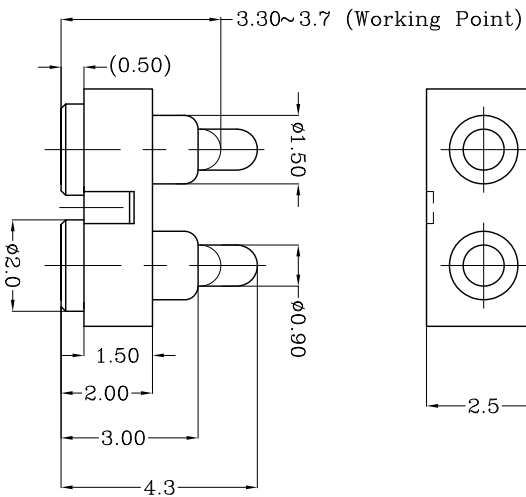

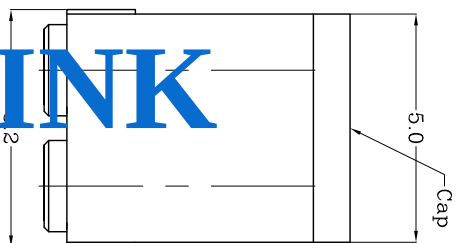


Recommended solder paste thickness is 0.10 mm

Recommended PCB Layout

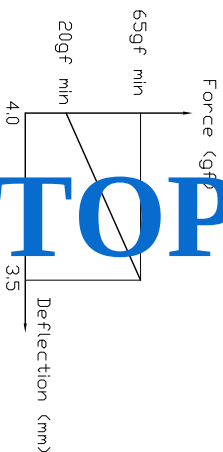

Cap for Vacuum Nozzle

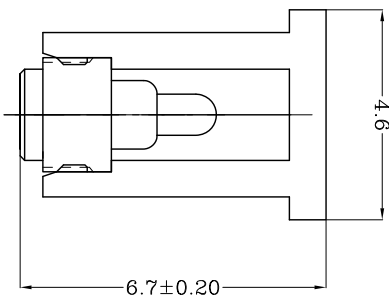

TOP-LINK

Notes:

¹ Material, Housing: PA 4.6 (30% Glass Filled)

Color Black.

Contact: Brass

2 Mechanical demands:

Plating Plunger: 0.4um Au over 1.4um Ni

Plating Body: 0.1um Au over 1.4um Ni.

	更新PCB尺寸		2010/07/12
	NEW		2008/12/02
LTR	REVISION RECORD	APVD	DATE

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED		MATL		HT TR	—	FIN	
0	= ±-	DWN		APVD		Top-Link Electronics Ltd <i>Top-Link Electronics</i>	
0.0	= ±0.15	qin					
0.00	= ±0.10	CHK		REL			
0.000	= ±						
ANGLE: ±1°							
SURF TEXTURE: 32/ 							
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT							
SCALE		A4	DWG NO.	C-100266		SHEET 1 OF 1	REV B
1:1							
NAME BATTERY POGO CONNECTOR 2 POSITIONS PGC-1.5-4.3-R-2P-2.54PH							

100266-2
PART NUMBER