
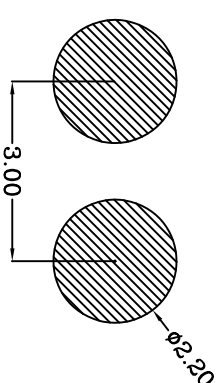
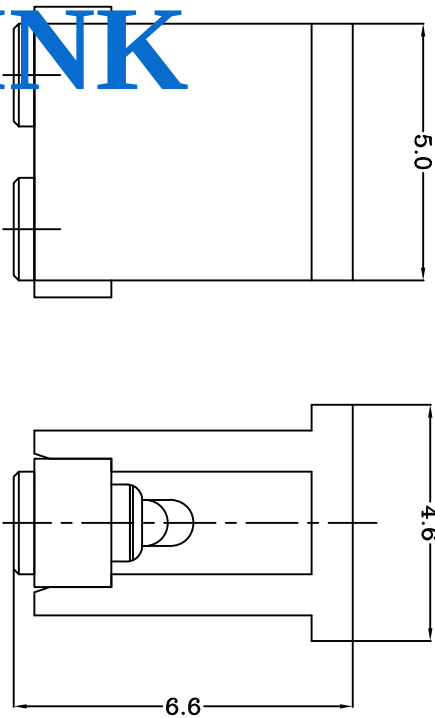
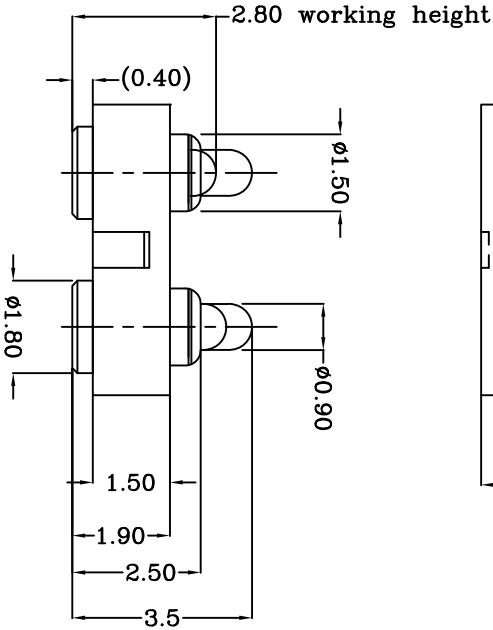


DWG NO.
C-100272

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

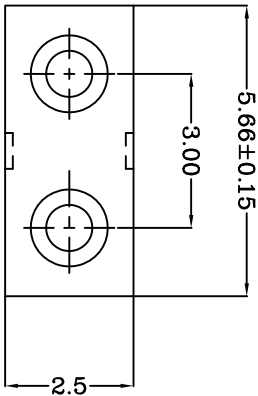

TOP-LINK

Recommended solder paste thickness is 0.10 mm
Recommended PCB Layout

Notes:
1 Material, Housing: PA 4,6 (30% Glass Filled)
Color: Black.
Contact: Brass
2 Mechanical demands:
Plating Plunger: 0.4µm Au over 1.4µm Ni
Plating Body: 0.1µm Au over 1.4µm Ni.

LDC
-
DIST
-

NEW	REVISION	APVD	DATE
LTR	RECORD		

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±		
0.0	= ±0.15		
0.00	= ±0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK			
SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
MATL	HT TR	FIN	
DWN	APVD		
Benny	Lansing		
CHK	REL		
Andy			
NAME	BATTERY POGD CONNECTOR 2 POSITIONS		
SCALE	1:1	A4	DWG NO. C-100272
SHEET	1 OF 1	REV	B

100272-2
PART NUMBER

USED ON
-