


Recommended PCB Layout

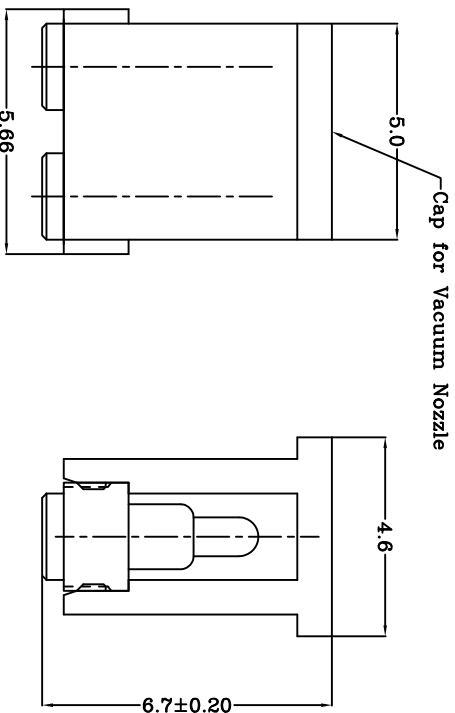

TOP-LINK

Spring :Stainless steel wire

1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating

(Body: 鍍金0.1um Min 鍍底1.4um Min)

2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
(Plunger: 鍍金0.4um Min 鍍底1.4um Min)

Total stroke(总行程): 1.20mm

Durability(寿命): 10,000 cycle min.

Contact resistance(接触抵抗): 30mOhm Max.

Voltage rating(额定电压): 36V DC Max

Current rating(额定电流): 2.0A

LOC				ANGLE: 11°	NAME			
-	new			SURF TEXTURE: 32/	PGGD CONNECTOR 2 POSITIONS			
DIST	09/09/10			REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX DD NOT SCALE PRINT	PGC-1.5-5.0-R-2P-3.0PH			
-	L TR	REVISION RECORD	APVD	DATE	SCALE	DWG NO.	SHEET 1 OF 1	REV
					A4	C-100300		A
					1:1			

100300-2	
PART NUMBER	

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED					
0	= ±-	MATL		HT TR —	FIN — ✓
0.0	= ±0.15	DWN			
0.00	= ±0.10	QIN			
0.000	= ±-	CHK		REL	<i>Top-Link Electronics</i> Top-Link Electronics Ltd.
ANGLE: ±1°					
SURF TEXTURE: 3.2/					
REMOVE BURRS, BREAK					
SHARP EDGES R0.05 MAX					
DO NOT SCALE PRINT					
SCALE	A4	DWG	PGC-1.5-5.0-R-2P-3.0PH		
1:1		ND	C-100300		
SHEET		REV			
1 OF 1		A			