


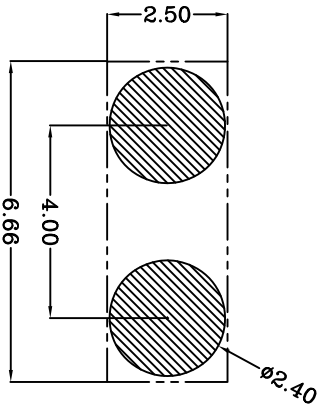

4

Table 1 Mechanical performance		
working height	5.60mm	100gf min<2.1>
Durability	10000cycle	

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
- 3 2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
- 4 2.2>Warning: Working height are not permitted to be less than Min working height.
- 5 Electrical performance
- 6 Resistance: 50mOhm Max.Current rating: 2.0A
- 7 4 Packaging Spec.Conformance to EIA 481
- 8 RoHS compliant.

Top-Link Electronics Ltd TOLERANCES UNLESS OTHER SPECIFIED 0.0 = ± 0.15 0.00 = ± 0.10 0.000 = $\pm$ — Angle: 31° SURF TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAXXDO NOT SCALE PRINT.	Type	Unit	Weight
	Customer drawing	mm	
	DWG: Q'n Zuozhong	APVD:	<i>Top-Link</i> <i>Electronics</i> Top-Link Electronics Ltd
	CHK:	REL:	
	Name		
Customer drawing			
Scale 1:1	Size A4	DWG No. C-100352	Page 1/1 Rev. A