
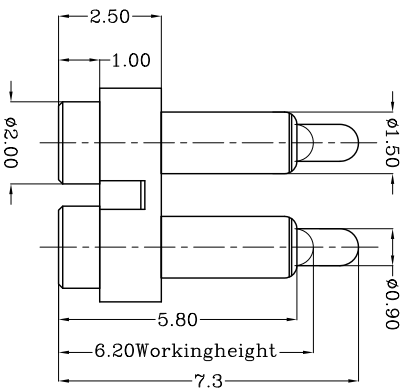


Recommended PCB Layout

Recommended solder patse thickness is 0.10 mm

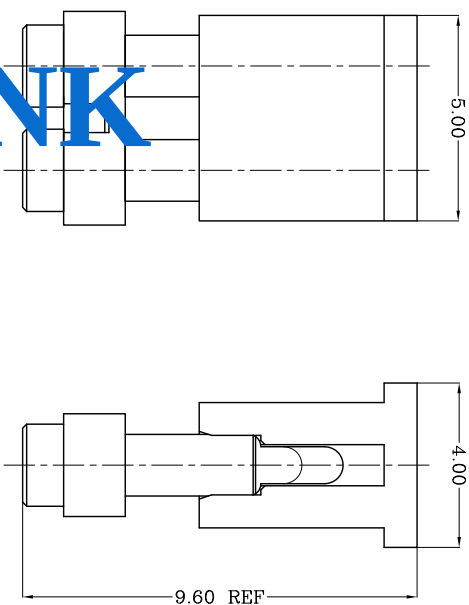

Notes:
1. Material (材质):

PA 4.6 (30% Glass Filled) Color Black.

Contact: Brass

Spring : Stainless steel wire

2 Platform

Min 0.1um Gold plating over min. 1.4um Nickel plating

(Body: 鍍金0.1um Min 鍍底1.4um Min)

Plating: Min 0.4um Gold plating over min. 1.4um Nickel plating

3 Mechanical:

Total stroke(总行程): 1.40mm

Durability (寿命): 10,000 cycle min.

4 Electrical(电性能)

Contact resistance(接触抵抗): 30mOhm Max.

Voltage rating(额定电压): 36V DC Max

Current rating(额定电流): 2.5A

100620-2	PART NUMBER
----------	-------------

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED		HT TR	FIN
MATL		—	A

0.0000	±	REL	<i>Top-Link</i> <i>Electronics</i>	Top-Link Electronics Ltd.
0.000	= ±0.10			
0.00	= ±0.15			
0	= ±			
PRINT LEVEL	DWN	APVD		

NEW		SURF. TEXTURE: $3\frac{1}{2}$		NAME	
REVISION RECORD	APVD	DATE	2010/05/06	SCALE	1:1
L TR			DWG NO. C-100620		
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX			SHEET 1 OF 1		
DO NOT SCALE PRINT			REV 1		