

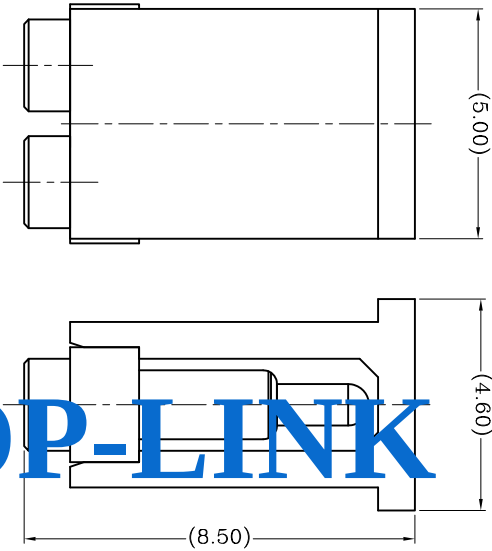



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

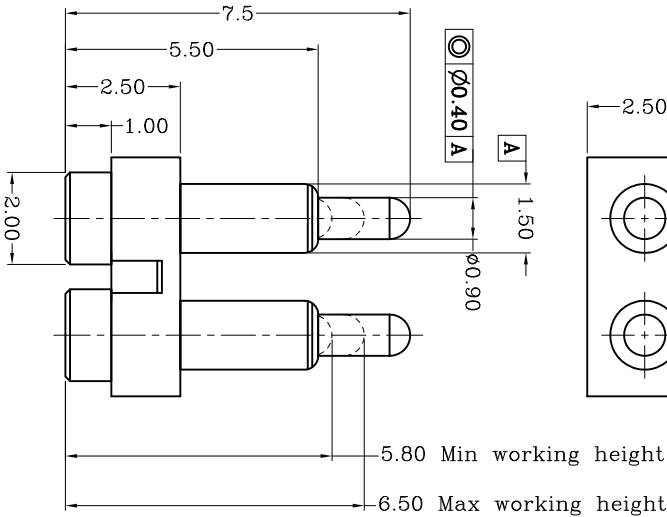

DWN No.:
C-10101021225



TOP-LINK



Item	Part name	Q'ty/Ed	Material	Finish
1	HSG	1	High temp Plastic UL94 V-0 Halogen-free Color Black	_____
2	Body	3	C3604(黄铜C3604)	Au plating 0.1um min Ni plating 1.4um min
3	Plunger	3	C3604(黄铜C3604)	Au plating 0.4um min Ni plating 1.4um min
4	Spring	3	SUS304(不锈钢SUS304)	_____
5	CAP	1	胶垫PA46	_____

Table 1 Mechanical performance			
max working height (最大工作高度)	6.50mm	80gf min<2.1>	
min working height (最小工作高度)	5.80mm	180gf max<2.1>	
Durability(寿命)			
10000cycle(10000次)			

Notes:

- Dimensions shall be interpreted per ASME Y14.5M.
尺寸标准遵从ASME Y14.5M.
- Mechanical performance(See the table 1) (机械性能见表1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
<2.1>弹力大小为产品下压和回弹时的平均值
<2.2>Warning: Working height are not permitted to be less than Min working height.
<2.2>工作高度不得低于标示的最小工作高度
- Electrical performance (电气性能)
Insulation Resistance: 1,000M0hm minimum(绝缘电阻: 1000M欧以上)
Dielectric Withstand Voltage: 500VAC/minute(抗电压: 500VAC/minute)
Dynamic Resistance: 30m0hm Max.(between max and min working height)
工作高度范围内的动态电阻: 最大30m0hm
Current rating: 2.5A(额定电流: 2.5A)
Packaging specification conforms to EIA 481
包装规范符合EIA 481
- Working temperature (工作环境)
Withstanding Higt Temperature: 270℃(耐温: 270℃)
Operational Temperature: -40℃~+85℃(工作温度: -40℃~+85℃)
- RoHS compliant.(产品符合RoHS标准)

10101021225
PART NUMBER

Top-Link Electronics Ltd.			
OTHER SPECIFIED	TOLERANCES UNLESS OTHER SPECIFIED	Type	Unit
0.00 = ±0.15	0.00 = ±0.10	Customer drawing	mm
0.000 = ±0.005	0.000 = ±0.005	APVD:	
Angle: ±1°	Angle: ±1°	CHK:	REL:
SURF. TEXTURE: REMOVE BURRS.	SURF. TEXTURE: REMOVE BURRS.	Name	
BREAK SHARP EDGES	BREAK SHARP EDGES	Pogo pin connector	
RO.05 MAX. DO NOT SCALE PRINT.	RO.05 MAX. DO NOT SCALE PRINT.	Scale	Size
1:1	A4	DWG No.	C-10101021225
Page	1/1	Rev.	A

DIST
DIST
DIST

A	Replace the cap	2019/05/30
1	NEW	2013/07/17
Rev.	Revision record.	Date.