
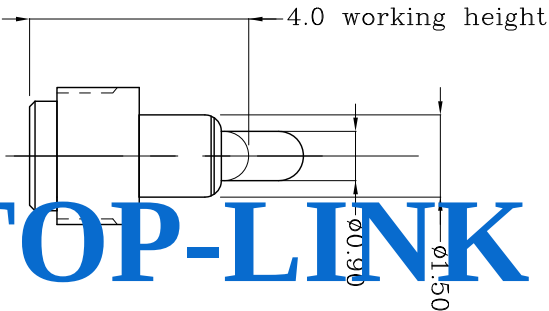

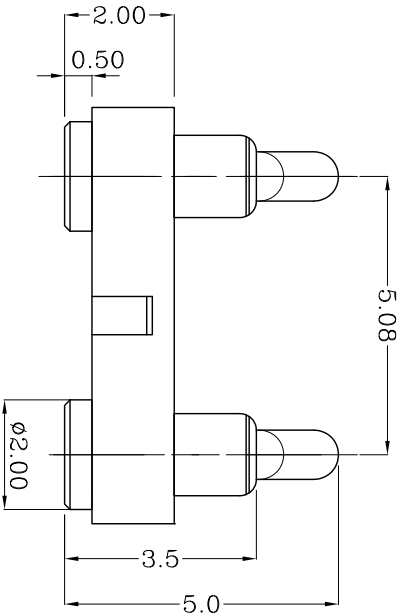



DWG NO.
C-110495

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK ELECTRONICS FACTORY

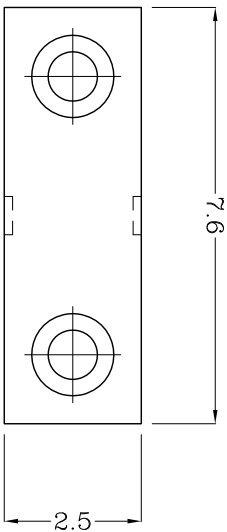

TOP-LINK

Recommended PCB Layout
Recommended solder paste thickness is 0.10 mm

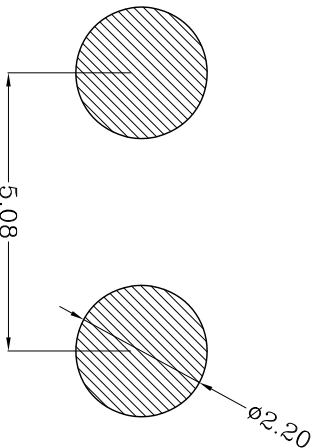

- Notes:
- 1 Material, Housing: PA 4,6 (30% Glass Filled)
Color Black, (UL94V-0)
 - 2 Mechanical demands:
Contact: Brass
Plating plunger: 0.4um Au over 1.4um Ni
Plating body: 0.1um Au over 1.4um Ni .

USED ON

-

110495-2

PART NUMBER

MATL	HT TR	FIN
DWN	APVD	—
QIN	Lansing	—
CHK	REL	—
Jin		—

Top-Link
Electronics Ltd.

NAME BATTERY CONNECTOR 2 PDS.

PGC-15-5.0-R-2P-5.08PH

SCALE 1:1 A4 DWG NO. C-110495

REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED
0 = ±
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±
ANGLE: ±1°
SURF TEXTURE: 32/
V

DATE	APVD	REVISION RECORD	NEW

L TR

LDC	DIST
-	-

4

3

2

1