


proposal

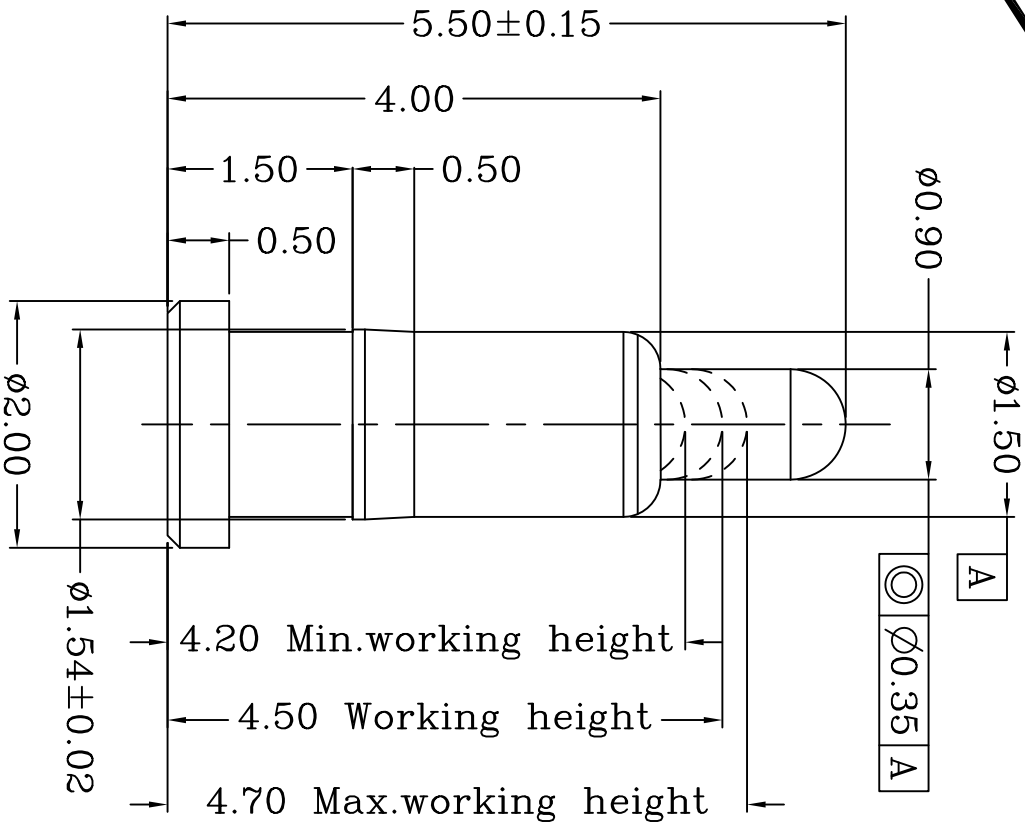

TOP-LINK

Item	Part name	Qty/Ea	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.4um plating Ni 1.4um
3	Spring	1	Stainless steel wire	_____
4				
5				

Table 1 Mechanical performance		
Working height	4.50mm	120±30g<2.1>
Durability	10000cycle	

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
<2.2>Warning: Working height are not permitted to be less than Min working height.
- 3 Electrical performance
Resistance: 30mOhm Max.
Current rating: 3.0A
- 4 RoHS compliant.

E3	Update	2016/07/13
E2	Update	2016/02/24
E1	Update	2015/12/25
E	Update remark	2007/12/14
Rev.	Revision record.	Date.

Top-Link
Electronics Ltd.
TOLERANCES UNLESS
OTHER SPECIFIED
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±0.05
Angle: ±1°
SURF. TEXTURE:
REMOVE BURRS.
BREAK SHARP EDGES
R0.05 MAX. DO NOT
SCALE PRINT.

Type	Unit	Weight
Customer drawing	mm	_____
DWN:	APVD:	
CHK:	REL:	
Name	POGO PIN	
Scale	Size	DWG No.
1:1	A4	C-101001
Page	Rev.	
1/1	E3	

Top-Link
Electronics
Electronics Ltd.

101001-1
PART NUMBER