



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
C-101009

LOC
-
DIST
-

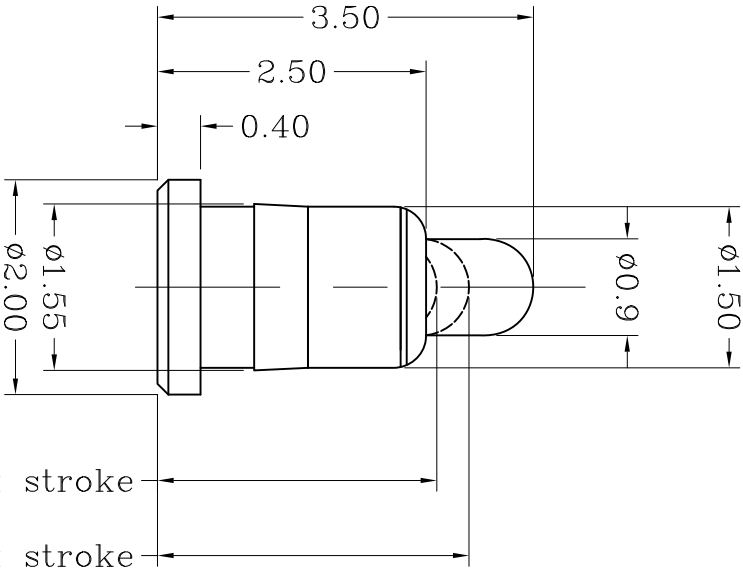

Notes:

- 1) Material: 1)Plunger & Body : CuZn36 Pb3, HO2 (C36000) or CuZn39 PB3 or CuZn38 PB2.
- 2) Springs : Stainless steel wire
- 2 Plating 1)Body: Min 0.1um Gold plating over min. 1.4um Nickle plating 2)Plunger: Min 0.2um Gold plating over min. 1.4um Nickle plating
- 3 Mechanical 1)Tension stroke : 0.9mm 2)Force : 100±30 gf at 0.6mm stroke.

TOP-LINK

USED ON

NEW			REVISED	DATE
LTR	RECORD	APVD		

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED				MATERIAL				HT TR				FIN			
0	= ±			0.0	= ±0.15			DWN				APVD			
0.00	= ±0.10			0.00	= ±0.10			CHK				REL			
0.000	= ±			ANGLE: ±1°											
SURF TEXTURE: 3.2/				NAME				POGO PIN				PG-2.0-0.4-1.5-3.5			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT				SCALE				A4				DWG NO.			
				1:1								C-101009			
												SHEET 1 OF 1			
												REV A			

Top-Link
Electronics Ltd.

PART NUMBER

101009-1