


DWG NO.
C-101023

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

LDC	-
DIST	-

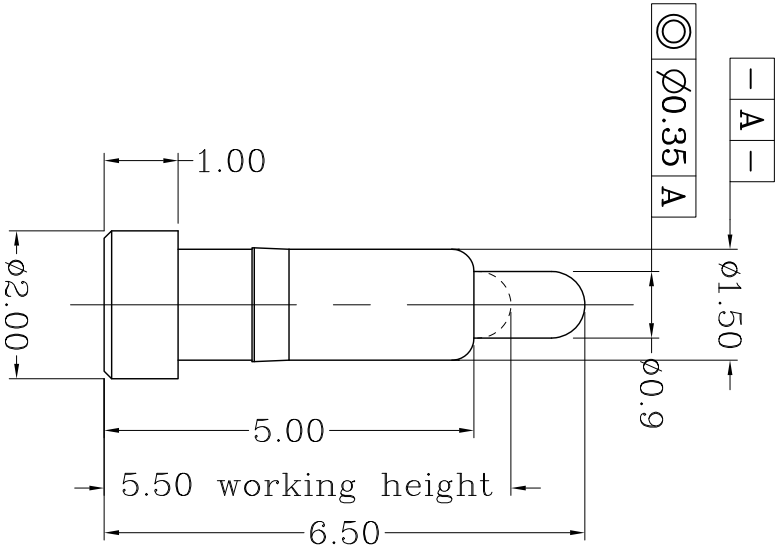

Notes:

△Material(材质):

1)Body : Brass

2)Plunge : Brass

3)Spring : Stainless steel wire

2 Pin plug(电镀):

1)Plunge: Min 0.1um Gold plating over min. 1.4um Nickel plating

(Body: 镀金0.1um Min 镍底1.4um Min)

2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating

(Pinner: 镀金0.4um Min 镍底1.4um Min)

3 Mechanical(机械性能):

1) Force 125±30gf per pin at 1.0mm stroke

(力: 125.0mm 的力:125±30gf)

2)Total stroke(总行程) : 1.40mm

3)Durability(寿命): 10,000 cycle min.

4 Electrical(电性能)

1) Contact resistance(接触阻抗): 30mOhm Max.

2) Voltage rating(额定电压): 36V DC Max

3)Current rating(额定电流): 2.0A

TOP-LINK

USED ON

-

101023-1
PART NUMBER

DIMENSIONS IN MM			
TOLERANCES UNLESS OTHER SPECIFIED			
0	= ± -		
0.0	= ±0.10		
0.00	= ± -		
0.000	= ±		

SURF TEXTURE: 32/			
ANGLE: ±1°			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			

MATL	HT TR	FIN
DWN	APVD	Top-Link Electronics Ltd.
CHK	REL	
NAME		
POGO PIN		
PG-2.0-1.0-1.5-6.5		
SCALE	DWG NO.	SHEET
1:1	A4	1 OF 1
REV B		

renewal	2010/09/27	DATE
NEW	2007/05/06	DATE
REVISION RECORD	APVD	DATE
LTR		

4

3

2

1