



DWG NO.
C-101029

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

LDC
-
DIST
-

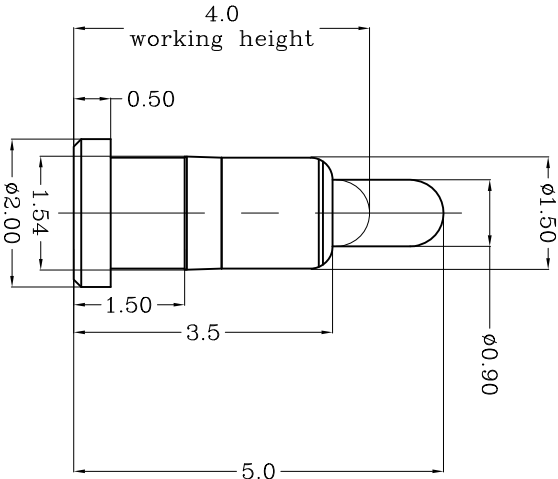

TOP-LINK

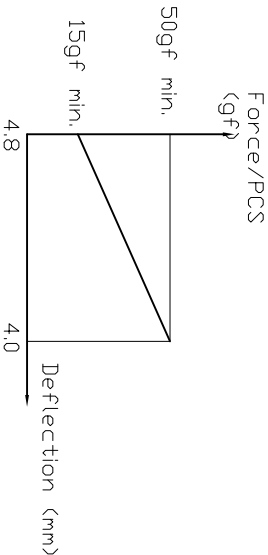

- Notes:
- Material:
- 1)Plunger & Body : CuZn36 Pb3, H02 (C36000)
or CuZn39 PB3 or CuZn38 PB2 or CuZn36(C2700).
- 2)Spring : Stainless steel wire
- 2 Plating
- 1)Body: 0.1um Gold plating over min. 1.4um Nickel plating
- 2)Plunger: 0.4um Gold plating over min. 1.4um Nickel plating
- 3 Mechanical
- 1)Total stroke : 1.4mm
- 2)Durability: 10,000 cycle min.
- Electrical
- 1)Contact resistance: 30mOhm Max.
- 2)Operating voltage: 36VDC

USED ON

-

DIMENSIONS IN MM			
TOLERANCES UNLESS OTHER SPECIFIED			
0	= ± -		
0.0	= ±0.15		
0.00	= ± 0.10		
0.000	= ±		
ANGLE: ±1°			
SURF. TEXTURE: 32/			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
MTRL		HT TR	FIN
DWN		APVD	—
CHK		Lansing	—
Anydy		REL	—
NAME		PGGD PIN	—
SCALE		DWG NO.	—
1:1		C-101029	—
A4		PG-2.0-0.5-1.5-3.5-5.0	—
SHEET		1 OF 1	REV
A		1	A

PART NUMBER

101029-1

A

B

C

D

4

3

2

1