



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWN No.:
C-101036

DIST

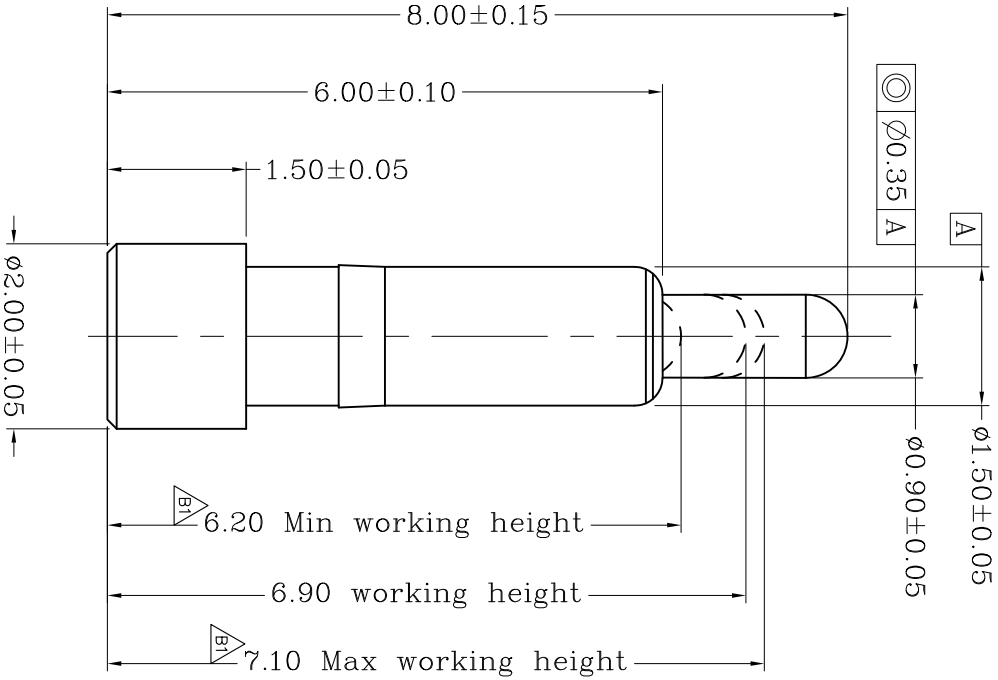

TOP-LINK

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
- 2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
- 2.2>Warning: Working height are not permitted to be less than Min working height.
- 3 Electrical performance
Resistance: 30mOhm Max.
Current rating: 2.0A
- 4 RoHS compliant.

Table 1 Mechanical performance

working height	6.90mm	110±30gf <2.1>
Durability	10000cycle	

Item	Part name	Qty/Ea'	Material	Finish
1	Body	1	Leaded Brass	Min 0.1um Gold over 1.4~3.4um Nickel
2	Plunger	1	Leaded Brass	Min 0.4um Gold over 1.4~3.4um Nickel
3	Spring	1	Stainless steel wire	_____
4				
5				

101036-1
PART NUMBER

Top-Link Electronics Ltd.		Type	Unit	Weight
TOLERANCES UNLESS OTHER SPECIFIED		Customer drawing	mm	
B1	Renewal	2015/08/13		
B	Renewal	2011/05/27		
A	NEW	2007/04/03		
Rev.	Revision record.	Date.		
Top-Link Electronics Ltd.		DWN:	APVD:	
OTHER SPECIFIED		Caivanlu	REL:	
0.0 = ±0.15 0.00 = ±0.10 0.000 = ±0.05 Angle: ±1° SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX, DO NOT SCALE PRINT.		Name	PGO PIN	PG-2.0-1.5-1.5-6.0-8.0
Scale		Size	DWG No.	Page
1:1		A4	C-101036	1/1
				Rev.
				B1

A

B

C

D

4

3

2

1