



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.




DWG NO.
C-101039

LDC
-
DIST
-

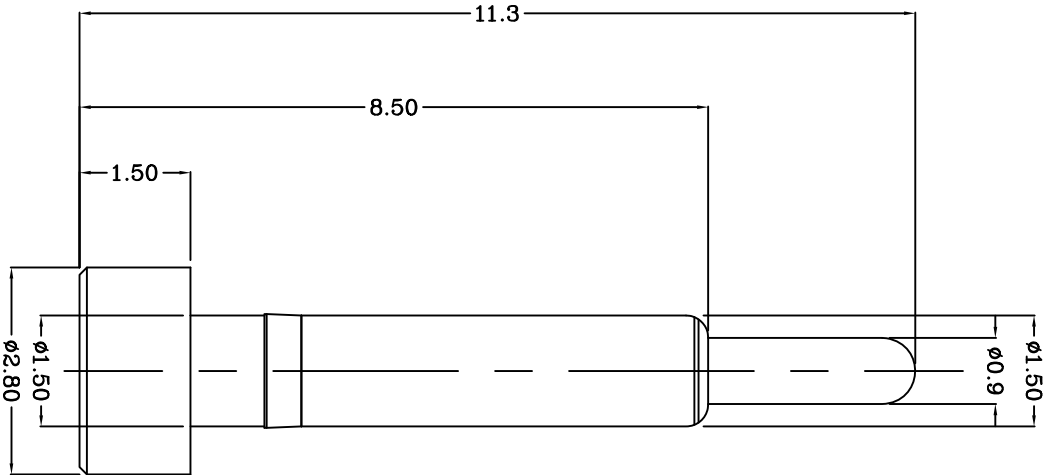

TOP-LINK

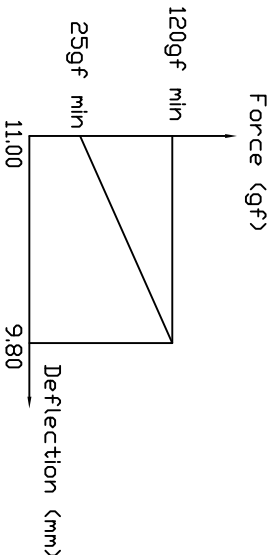

Notes:

Material:

1)Plunger & Body : CuZn36 Pb3, H02 (C36000)
or CuZn39 PB3 or CuZn38 PB2.

2)Spring : Stainless steel wire

2 Plating

1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating

2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating

3 Mechanical

1)Total stroke : 2.5mm

2)Durability: 10,000 cycle min.

4 Electrical

1)Contact resistance: 30mOhm Max.

2)Operating voltage: 36VDC

USED ON

-

DIMENSIONS IN MM			
TOLERANCES UNLESS			
OTHER SPECIFIED			
0	= ± -		
0.0	= ±0.15		
0.00	= ±0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK			
SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			

MATL	HT TR	FIN
DWN	—	—
Benny	APVD	Lansing
CHK	REL	
Andy		
NAME	POGO PIN	
SCALE	PG-2.8-1.5-1.5-11.3	
1:1	A4	DWG NO. C-101039

101039-1
PART NUMBER

Top-Link
Electronics Ltd.

SHEET
1 OF 1

REV
B