



DWG NO.
101040

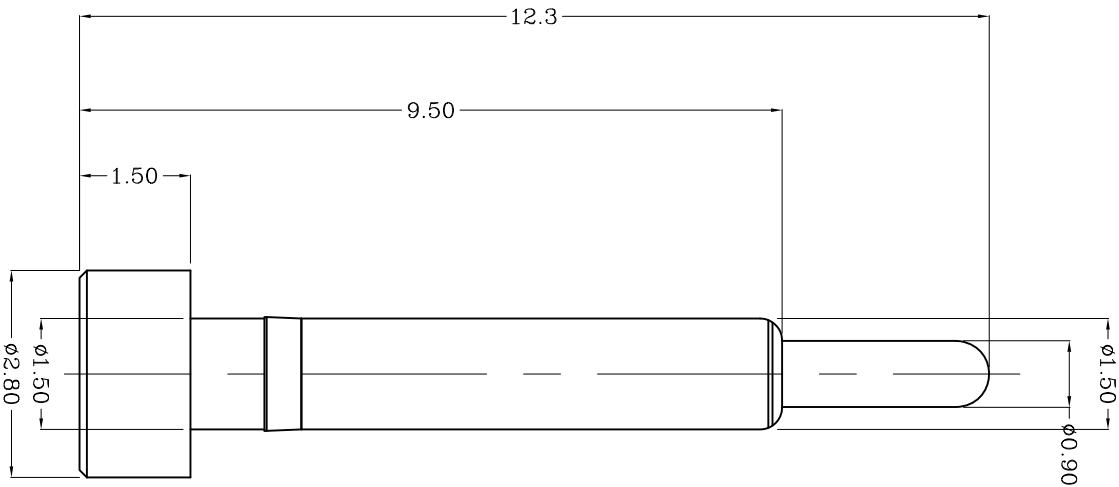

TOP-LINK

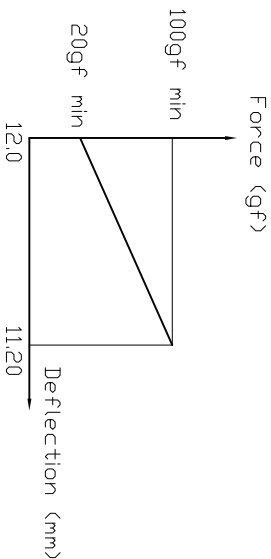

Notes:  Material:

Material:

1)Plunger & Body : CuZn36 Pb3, HO2 (C36000)

or CuZn₃₉ PB3 or CuZn₃₈ PB2 or CuZn₃₆(C2700).

2) Spring : Stainless steel wire

2 Plating

1)Body: Min 0.1um Gold plating over min. 1.4um Nickle plating

2)Plunger: Min 0.4um Gold plating over min. 2.5um Nickle plating

3 Mechanical

1) Total stroke : 2.5mm

2)Durability: 10,000 cycle min.

4 Electrical

1) Contact resistance: 30mOhm Max.

2) Operating voltage: 36VDC

[illegible]

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED	MATL		HT TR	—	FIN	— ✓
0 = ± 0.0 = ±0.15 0.00 = ±0.10 0.000 = ± ANGLE: ±1°	△ 1					
SURF TEXTURE: 32/ ✓ REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT	DVN	APVD				
	CHK	REL				
	NAME	PGGD PIN PG-28-1.5-1.5-12.3 <i>teag-Link Electronics</i> Top-Link Electronics Ltd.				
	SCALE	A4	DWG NO.	101040	SHEET 1 OF 1	REV A

101040-1
PART NUMBER

USED ON
1