



DWG NO.
C-101043-1

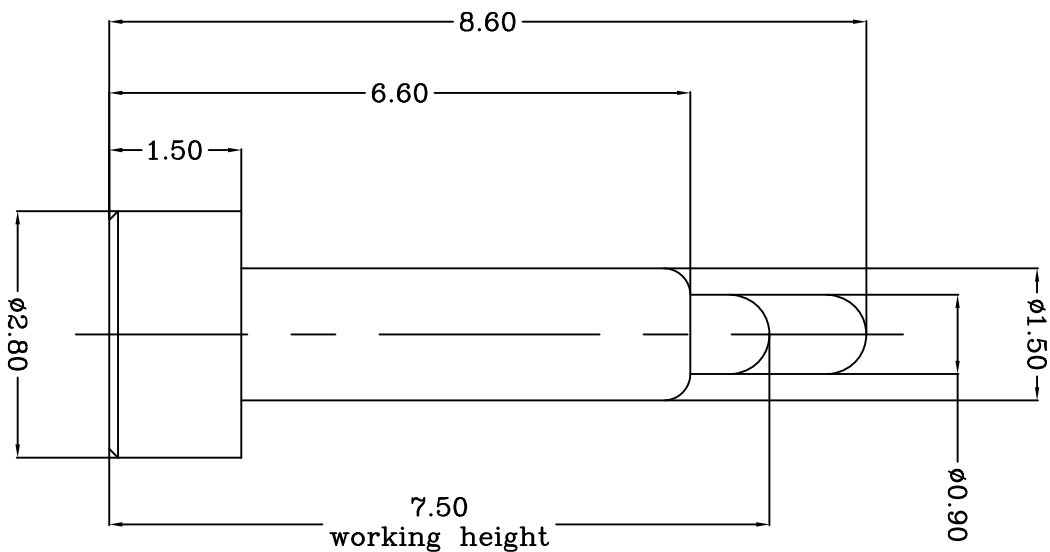

TOP-LINK

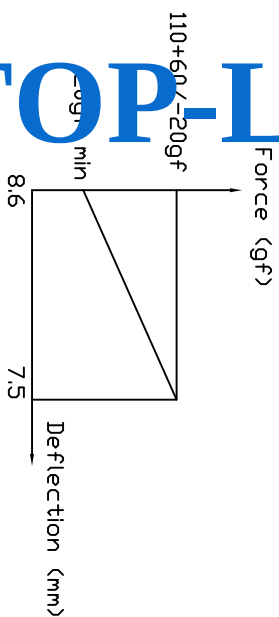

Notes:  Material

Material:

1)Plunger & Body : CuZn36 Pb3, HO2 (C36000)

or CuZn₃₉ PB3 or CuZn₃₈ PB2.

2 Plating

1)Body: Min 0.1um Gold plating over min. 1.4um Nickle plating

2)Plunger: Min 0.4um Gold plating over min. 2.5um Nickle plating

3 Mechanical

1) Total stroke : 2.0mm

2)Durability: 10,000 cycle min.

4 Electrical

1)Contact resistance: 30mOhm Max.

2) Operating voltage: 36VDC

	NEW		8/20/07 10/4/05
LTR	REVISION RECORD	APVD	DATE

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED		MATERIAL		HT TR		FIN	
0 = ±0		DWN		APVD		— ✓	
0.0 = ±0.10		Benny		Lansing		Top-Link	
0.00 = ±0.10		CHK		REL		Electronics Ltd.	
0.000 = ±0.000		Any					
ANGLE: ±1°		NAME		PGGD PIN			
SURF TEXTURE: 32/		SCALE		DWG		SHEET	
REMOVE BURS, BREAK		A4		C-101043-1		1 OF 1	
SHARP EDGES R0.05 MAX		1:1		ND		REV	
DO NOT SCALE PRINT						A	

USED ON

1