
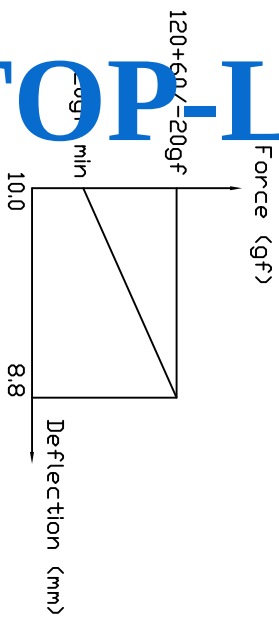


DWG NO.
C-101044

	NEW		2007/04/05
LTR	REVISION RECORD	APVD	DATE

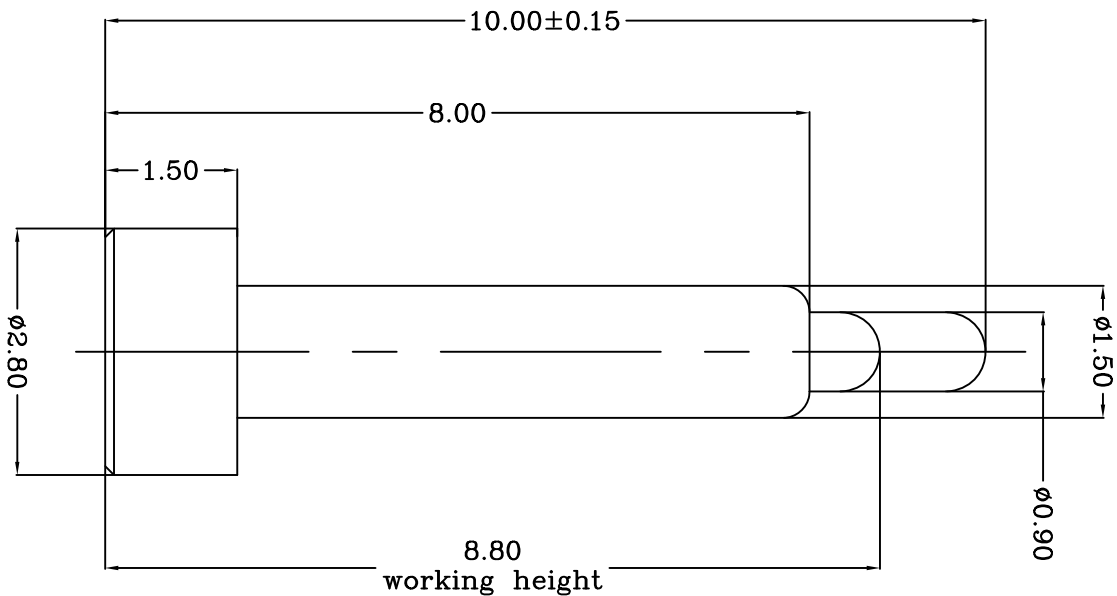

TOP-LINK

Notes:
 ⚠ Material:

Material:

1)Plunger & Body : CuZn36 Pb3, HO2 (C36000)
or CuZn39 PB3 or CuZn38 PB2.

2) Spring : Stainless steel wire

2 Plating

- 1) Body: Min 0.1um Gold plating over min. 1.4um Nickle plating
- 2) Plunger: Min 0.4um Gold plating over min. 2.5um Nickle plating

3 Mechanical

1) Total stroke : 1.80mm

2)Durability: 10,000 cycle min.

Electrical

1) Contact resistance: 30mOhm Max.

2) Operating voltage: 36VDC

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED				MATERIAL		HT TR		FIN	
0 = ± 0.0 = ±0.10 0.00 = ±0.10 0.000 = ± ANGLE: ±1°				DWN		APVD		Top-Link Electronics Ltd.	
SURF. TEXTURE: 32/				Benny		Lensing		Top-Link Electronics Ltd.	
REMOVE BURS, BREAK SHARP EDGES, R0.05 MAX				CHK		REL		Top-Link Electronics Ltd.	
DO NOT SCALE PRINT				Andy				Top-Link Electronics Ltd.	
NAME				PGGD PIN		PG-2.8-1.5-10.0H		Top-Link Electronics Ltd.	
SCALE				A4		DWG NO.		SHEET	
1:1						C-101044		1 OF 1	
								REV	
								A	

101044-1
PART NUMBER

USED ON

1