



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
C-101062

LDC
-
DIST
-

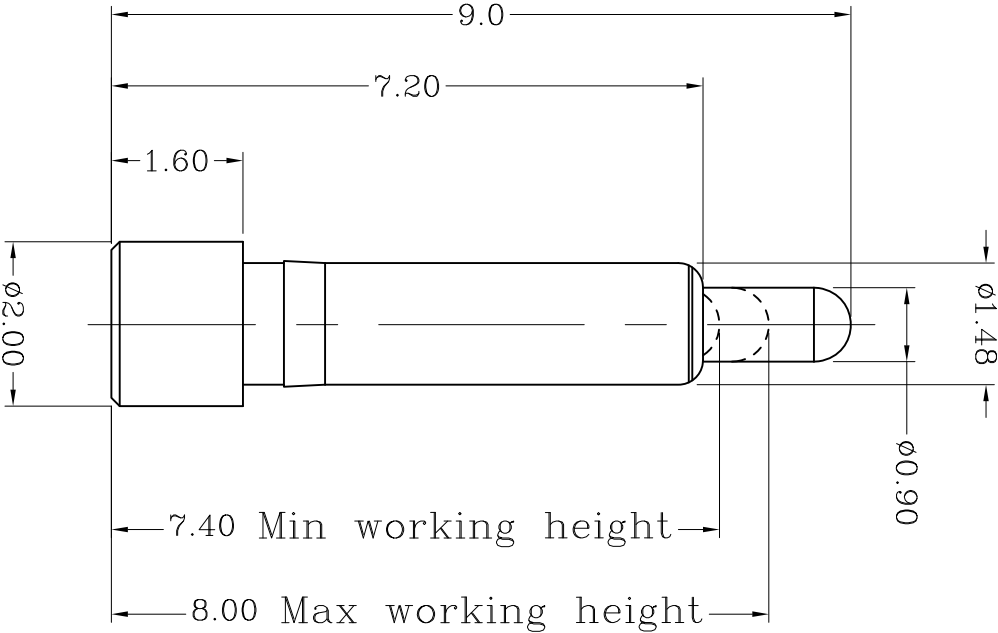

TOP-LINK

Material:

1) Body: Min 0.1um Gold plating over min. 1.4um Nickle plating
2) Flinger: Min 0.4um Gold plating over min. 1.4um Nickle plating
or CuZn39 PB3 or CuZn38 PB2.

2) Spring : Stainless steel wire

3) Mechanical

1) Force: Min 100±30gf per pin at 1.0mm stroke

2) Total stroke : 1.6mm

3) Durability(寿命): 10,000 cycle min

1) Force: Min 100±30gf per pin at 1.0mm stroke

2) Total stroke : 1.6mm

3) Durability(寿命): 10,000 cycle min

USED DN

101062-1

PART NUMBER

Top-Link
Electronics Ltd.

MATL	HT	TR	FIN
DWN	APVD		
CHK	REL		
NAME	PGGD	PIN	PG-2.0-16-15-7.2-9.0

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED
0 = ±
0.0 = ±0.10
0.00 = ±
0.000 = ±
ANGLE: ±1°
SURF TEXTURE: 3.2/
REMOVE BURRS, BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

SCALE	A4	DWG	NO.	SHEET	REV
1:1	A4	NO.	C-101062	1 OF 1	A

4

3

2

1