




DIST

DIST

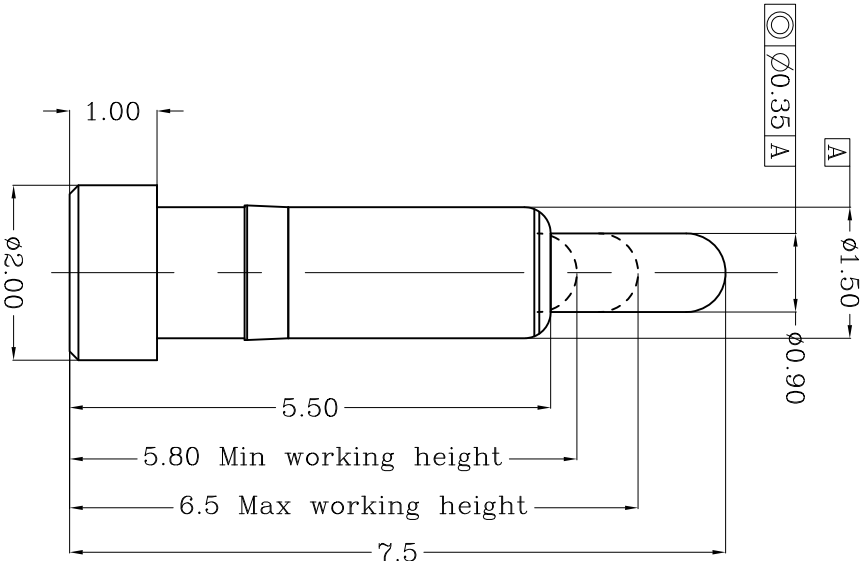

Item	Part name	Q'ty/Ed	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um min over Ni 1.4um min
2	Plunger	1	Leaded Brass	Au 0.4um min over Ni 1.4um min
3	Spring	1	Stainless steel wire	_____
4				
5				

Table 1 Mechanical performance		
Max working height	6.50mm	80gf min<2.1>
Min working height	5.80mm	165±35
Durability	10000cycle	

Not

1 Dimensions shall be interpreted per ASME Y14.5M.

2 Mechanical performance(See the table 1)

<2.1> The force is the average of forces obtained when plunger goes downwards and upwards.

<2.2> Warning: Working height are not permitted to be less than min working height.

3 Electrical performance

Resistance: 30mOhm Max.

B.1 Current rating: 2.0A

4 RoHS compliant.



Renewel	2013/12/04
Renewel	2007/08/03
NEW	2007/06/05
Revision record.	Date.

Top-Link Electronics Ltd.		Type	Unit	Weight
TOLERANCES UNLESS OTHER SPECIFIED		Customer drawing	mm	
0.0	±0.15	DWN:	APVD:	
0.00	±0.10	CHK:	REL:	
0.000	±0.05	Angle:		
SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX. DO NOT SCALE PRINT.		Name	POGO PIN	
Scale	Size	DWG No.	Page	Rev.
1:1	A4	C-101063	1/1	B.1

101063-1
PART NUMBER

A

B

C

D