



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.




DWG NO.
C-101067

LDC
-
DIST
-

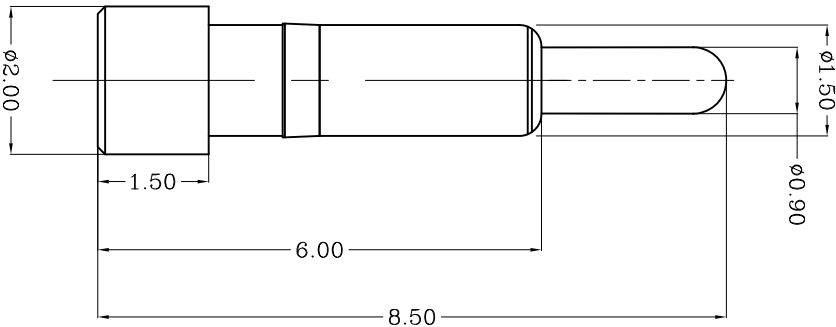

TOP-LINK

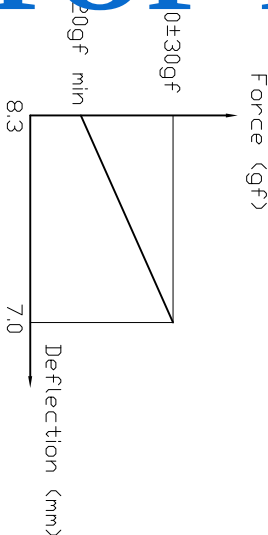

Notes:

Material:

1)Plunger & Body : CuZn36 Pb3, H02 (C36000)
or CuZn39 PB3 or CuZn38 PB2.

2)Spring : Stainless steel wire

2 Plating

1)Body: 0.1um Gold plating over 1.4um Nickle plating

2)Plunger: 0.4um Gold plating over 1.4um Nickle plating

3 Mechanical

1)Total stroke : 2.4mm

2)Durability: 10,000 cycle min.

4 Electrical

1)Contact resistance: 30mOhm Max.

2)Operating voltage: 36VDC Max.

DIMENSIONS IN MM				TOLERANCES UNLESS OTHER SPECIFIED			
0	= ± -	0.0	= ±0.10	0.00	= ± -	0.000	= ±
ANGLE: ±1°							
SURF TEXTURE: 32/							
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX							
DO NOT SCALE PRINT							
MATL	1	HT TR	-	FIN	-	FIN	-
DWN	Benny	APVD	Lansing	REL			
CHK	Andy						
NAME	POGO PIN						
SCALE	1:1	A4	DWG NO.	C-101067	SHEET	1 OF 1	REV
							A

Top-Link
Electronics Ltd.

101067-1
PART NUMBER

USED ON

-