


LDC	-
DIST	-

4


3

2

1

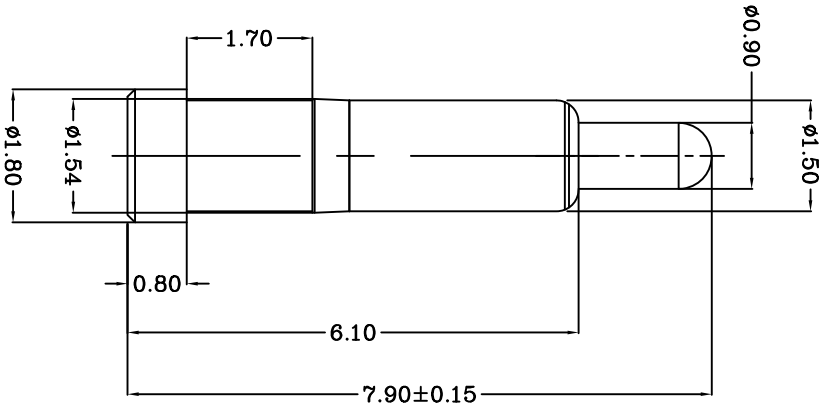

TOP-LINK

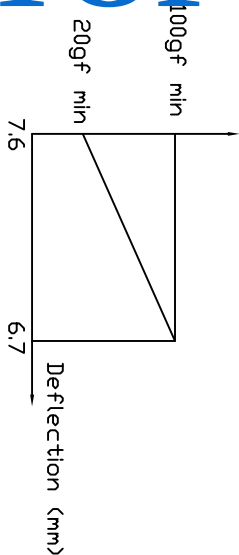

- Notes:
- Material:
- 1)Plunger & Body : CuZn36 Pb3, H02 (C36000)
or CuZn39 PB3 or CuZn38 PB2.
- 2)Spring : Stainless steel wire
- 2 Plating
- 1)Body: Min 0.1um Gold plating over min. 1.4um Nickle plating
- 2)Plunger: Min 0.4um Gold plating over min. 2.5um Nickle plating
- 3 Mechanical
- 1)Total stroke : 1.6mm
- 2)Durability: 10,000 cycle min.
- 4 Electrical
- 1)Contact resistance: 30mOhm Max.
- 2)Operating voltage: 36VDC

USED ON

-

101069-1

PART NUMBER

MATL		HT TR	-	FIN	-
------	--	-------	---	-----	---

DWN	APVD	Top-Link Electronics Ltd.
-----	------	---------------------------

CHK	REL	Top-Link Electronics Ltd.
-----	-----	---------------------------

NAME	POGO PIN	PG-1.8-0.8-1.5-6.1-7.9
SCALE	1:1	A4
DWG NO.	C-101069	SHEET 1 OF 1
REV	A	