



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
C-101078

LDC
-
DIST
-

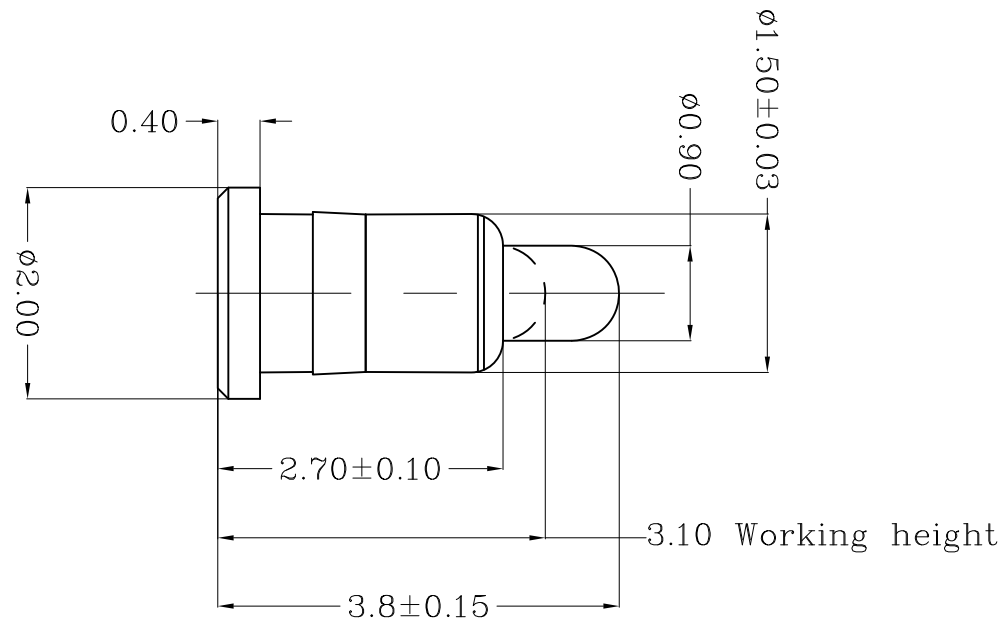

LTR	Add dimension
REVISION	
RECORD	
APVD	
DATE	2008/07/01

DIMENSIONS IN MM			
TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±		
0.0	= ±0.05		
0.00	= ±0.03		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
MATL	1	HT TR	FIN
DWN		APVD	
QIN		Lansing	
CHK		REL	
Jin			
NAME	PGGD PIN		
SCALE	1:1	A4	DWG NO.
			C-101078
			PG-2.0-0.4-1.5-2.7-3.8
			Top-Link Electronics Ltd.
			101078-1
			PART NUMBER
			FIN
			1 OF 1
			REV D

Notes:

Material(材质):

1)Body : Brass

2)Plunge : Brass

3)Spring :Stainless steel wire

2 Plating(电镀):

1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating

(镀金0.1um Min 镍底1.4um Min)

2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating

(镀金0.4um Min 镍底1.4um Min)

3 Mechanical(机械性能):

1) Force: 80±30gf per pin at 0.7mm stroke

(力: 80.7mm 的力:80±30gf)

2) Total stroke(总行程) : 0.90mm

3)Durability(寿命): 10,000 cycle min.

4 Electrical(电性能)

1) Contact resistance(接触阻抗): 30mOhm Max.

2) Voltage rating(额定电压): 36V DC Max

3) Current rating(额定电流): 2.0A

USED ON