


DWG NO.
C-101089

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

LDC	-
DIST	-

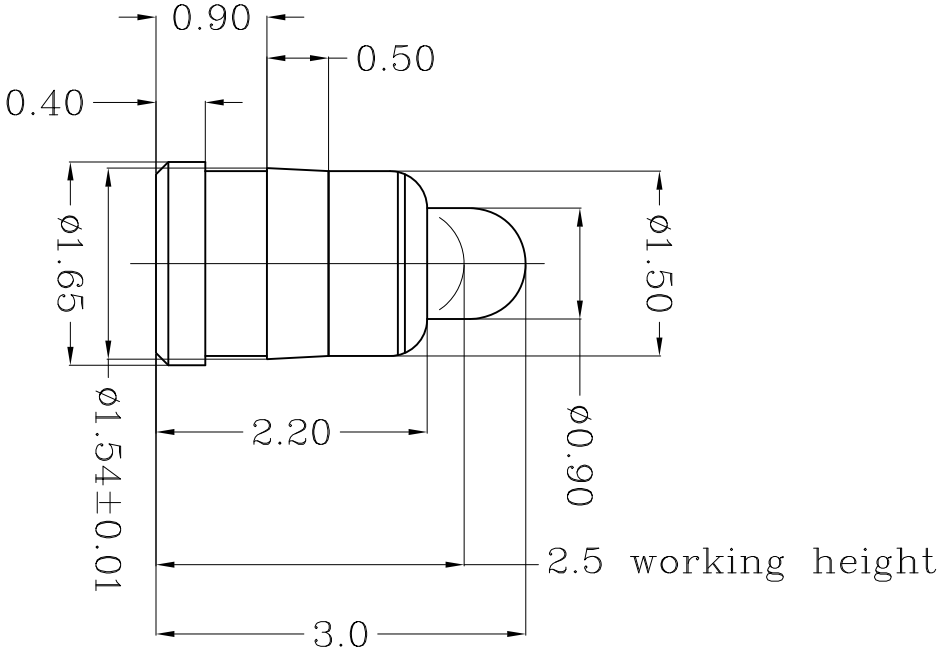

Notes:
△ Material(材质):

- 1)Body : Brass
- 2)Plunge : Brass
- 3)Spring : Stainless steel wire
- 2 Plating(电镀):
 - 1)Body: min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镍底1.4um Min)
 - 2)Plunger: min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镍底1.4um Min)
- 3 Mechanical(机械性能):
 - 1)Force: 90gf min per pin at 0.5mm stroke (力: 下压0.5mm 的力: 90gf min)
 - 2)Total stroke(总行程) : 0.70mm
 - 3)Durability(寿命): 10,000 cycle min.
- 4 Electrical(电气性能)
 - 1)Contact resistance(接触阻抗): 30mOhm Max.
 - 2)Voltage rating(额定电压): 36V DC Max
 - 3)Current rating(额定电流): 2.0A

update remark	
REVISION RECORD	APVD
DATE	

DIMENSIONS IN MM	
TOLERANCES UNLESS OTHER SPECIFIED	
0	= ± -
0.0	= ±0.15
0.00	= ±0.10
0.000	= ±
ANGLE: ±1°	
SURF TEXTURE: 32/	
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX	
DO NOT SCALE PRINT	

MATL	△ 1	HT TR	—	FIN	—	✓
DWN	Qin	APVD				
CHK		REL				
NAME						
POGDD PIN						
PG-1.65-0.4-1.5-2.2-3.0						
PG-1.65-0.4-1.5-2.2-3.0						
SCALE 1:1						
A4						
DWG NO. C-101089						
SHEET 1 OF 1						
REV F						

101089-1
PART NUMBER

USED ON
-