




proposal

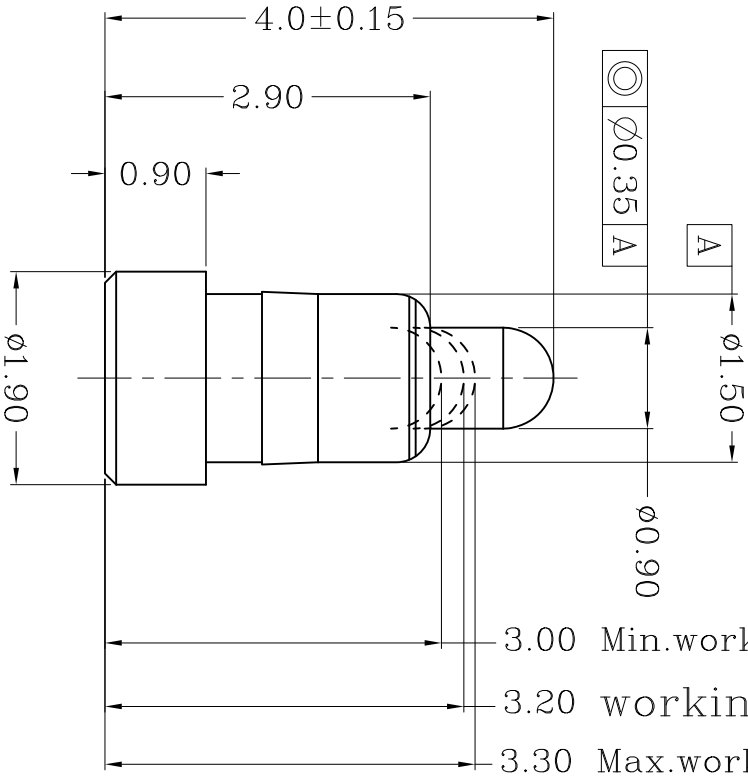

3.00 Min.working height
3.20 working height
3.30 Max.working height

TOP-LINK

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
- 2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
- 2.2>Warning: Working height are not permitted to be less than Min working height.
- 3 Electrical performance
Resistance: 30mOhm Max.
Current rating: 2.0A
- 4 RoHS compliant.

Item	Part name	Qty/Ed	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.4um plating Ni 1.4um
3	Spring	1	Stainless steel wire	_____
4				
5				

Table 1 Mechanical performance		
working height	3.20mm	120±35gf <2.1>
Durability	10000cycle	

DIST

A1	Update	2015/07/08
A	NEW	2007/10/07
Rev.	Revision record.	Date.

Top-Link Electronics Ltd.		Type	Unit	Weight	PART NUMBER	
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	Customer drawing	mm	101112-1	
0.0 = ±0.15		CHK:	Cai wanlu	APVD:	Top-Link Electronics Ltd.	
0.00 = ±0.10		REL:				
0.000 = ±0.05		Name	POGO PIN			
SURF. TEXTURE:		Scale	1:1	Size	A4	DWG No.
REMOVE BURRS:						C-101112
BREAK SHARP EDGES						Page
R0.05 MAX DO NOT						1/1
SCALE PRINT.						Rev.
						A1