



DWG NO.
C-101121

USED ON
-

Notes:

Material:

- 1)Plunger & Body : CuZn36 Pb3, HO2 (C36000) or CuZn39 PB3 or CuZn38 PB2 or CuZn36(C2700).
- 2)Spring : Stainless steel wire
- 2 Plating
 - 1)Body: 0.1um Gold plating over min. 1.4um Nickle plating
 - 2)Plunger: 0.4um Gold plating over min. 1.4um Nickle plating
- 3 Mechanical
 - 1)Total stroke : 0.8mm
 - 2)Durability: 10,000 cycle min.
- 4 Electrical
 - 1)Contact resistance: 30mOhm Max.
 - 2)Operating voltage: 36VDC

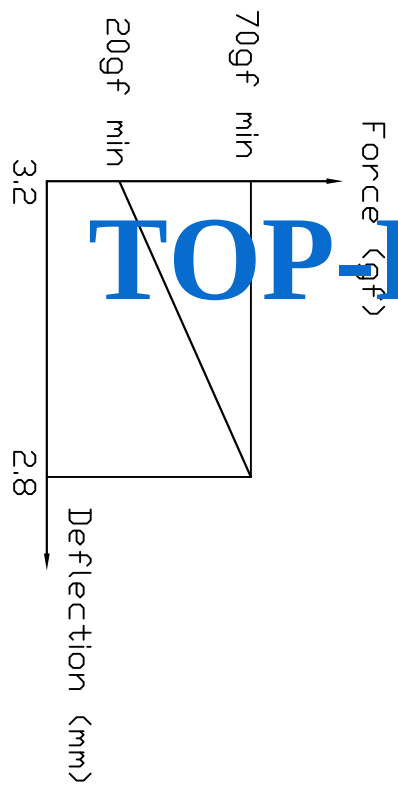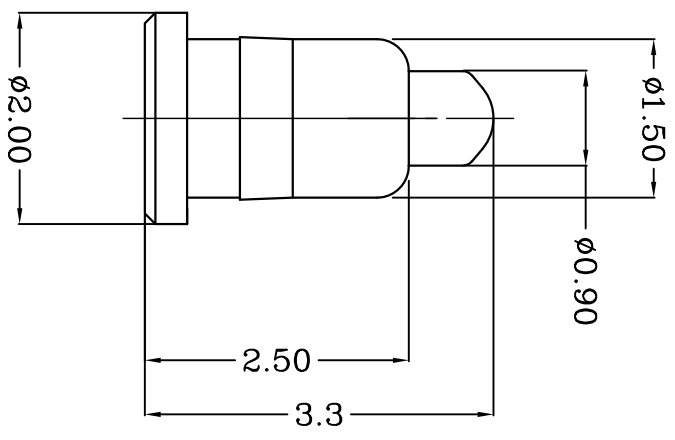

LDC	-
DIST	-

NEW		8007/11/00
REVISION	APVD	DATE
RECORD		
LTR		

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±		
0.0	= ±0.15		
0.00	= ±0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK			
SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
MATL	1	HT TR	FIN
DWN	APVD		
Benny	Lansing		
CHK	REL		
Andy			
NAME	PGGD PIN Customer Drawing		
SCALE	A4	DWG NO.	C-101121
1:1			
SHEET 1 OF 1		REV	A

101121-1
PART NUMBER

Top-Link
Electronics Ltd.