



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.  
C-101148

USED ON

-

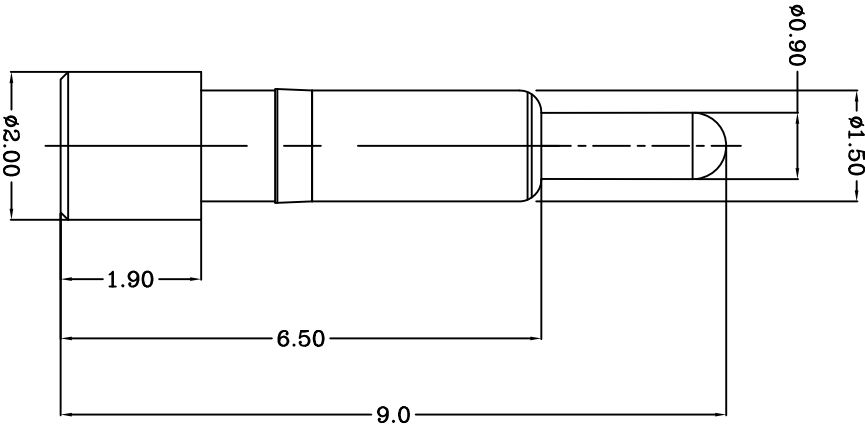

Notes:

Material(材质):

1) Body: C36000

2) Finish: C36000 or C27000

3) Spring: Stainless steel wire

2 Plating(电镀):

1) Body: Min 0.1um Gold plating over min. 1.4um Nickel plating

(Body: 镀金0.1um 镍底1.4um Min)

2) Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating

(Plunger: 镀金0.4um 镍底1.4um Min)

3) Mechanical(机械性能):

1) Force: 115±30gf per pin at 1.4mm stroke

(力: 下压1.4mm的力: 115±30gf)

2) Total stroke(总行程): 2.30mm

3) Life(寿命): 10,000 cycle min.

4 Electrical(电性能)

1) Contact resistance(接触阻抗): 30mOhm Max.

2) Voltage rating(额定电压): 36V DC Max

3) Current rating(额定电流): 2.0A

TOP-LINK

DIMENSIONS IN MM  
TOLERANCES UNLESS  
OTHER SPECIFIED

0 = ±

0.0 = ±0.15

0.00 = ±0.10

0.000 = ±

ANGLE: ±1°

SURF TEXTURE: 3.2/

REMOVE BURRS, BREAK  
SHARP EDGES R0.05 MAX

DO NOT SCALE PRINT

MATL

DWN

CHK

REL

NAME

SCALE

A4

1:1

HT TR

APVD

REL

PGGD PIN

PG-2.0-1.9-1.5-6.5-9.0

DWG NO.

C-101148

1

FIN

101148-1

PART NUMBER

Top-Link Electronics Ltd.

Top-Link Electronics Ltd.

PGGD PIN

PG-2.0-1.9-1.5-6.5-9.0

DWG NO.

C-101148

A

B

C

D

1

2

3

4