



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWN No.:
C-101175

DIST

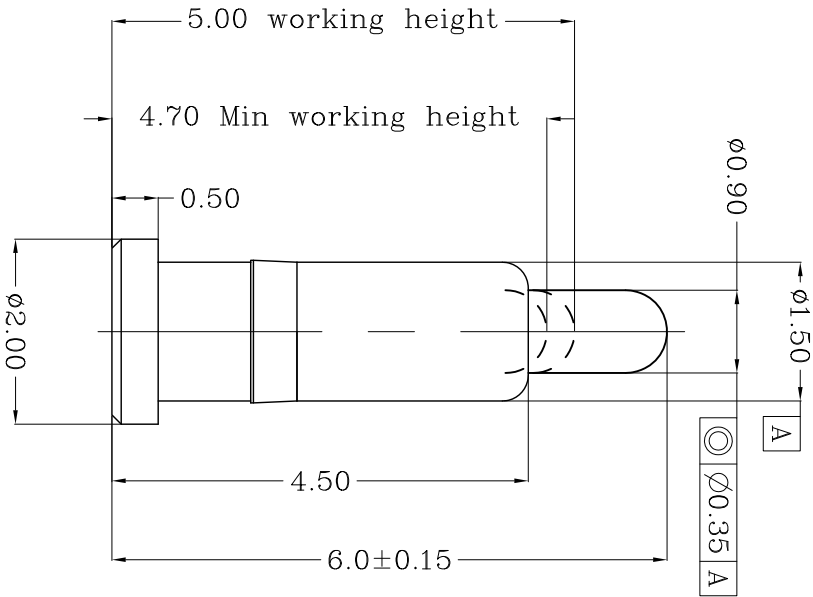

TOP LINK

Table 1 Mechanical performance		
Working height	5.00mm	90gf min<2.1>
Durability	10000cycle	

Item	Part name	Qty/Ed	Material	Finish
1	Body	1	Leoded Brass	Au plating over Ni plating
2	Plunger	1	Leoded Brass	Au plating over Ni plating
3	Spring	1	Stainless steel wire	_____
4				
5				

Notes
1. Dimensions shall be interpreted per ASME Y14.5M.
2. Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
<2.2>Warning: Working height are not permitted to be less than 5.00mm working height.
3. Electrical performance
Resistance: 30mOhm Max.
Insulation resistance rating: 2.0A
4. RoHS compliant.

Top-Link Electronics Ltd.		Type	Unit		Weight	
TOLERANCES UNLESS OTHER SPECIFIED		Customer drawing	mm		PART NUMBER	
0.0 = ±0.15	DWN:	APVD:	101175-1			
0.00 = ±0.10	CHK:	REL:	Top-Link Electronics Ltd.			
0.000 = ±0.05	Name					Top-Link Electronics Ltd.
Angle: ±4°	POGO PIN					
SURF. TEXTURE:	Scale					Page
REMOVE BURRS:	1:1					1/1
BREAK SHARP EDGES	Size					Rev.
R0.05 MAX. DO NOT SCALE PRINT.	A4					1
	DWG No.					
	C-101175					