



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.




DWG NO.
C-101198

LDC
-
DIST
-

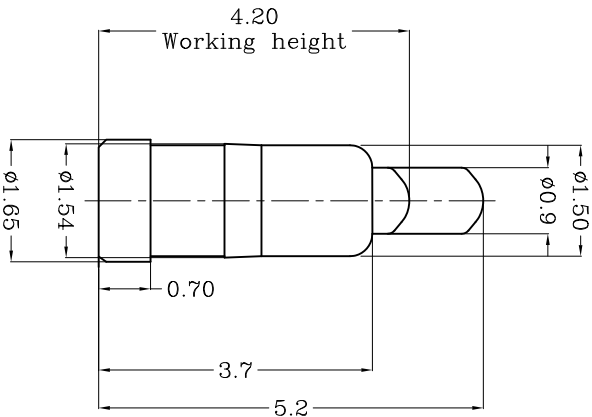

TOP-LINK

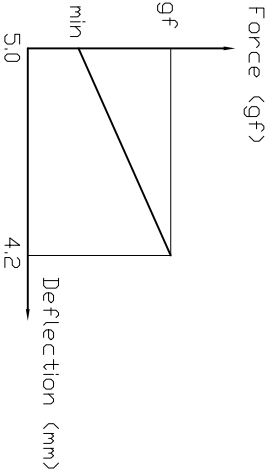

- Notes:
- Material:
- 1)Plunger & Body : CuZn36 Pb3, H02 (C36000)
or CuZn39 PB3 or CuZn38 PB2.
- 2)Spring : Stainless steel wire
- 2 Plating
- 1)Body: Min 0.1um Gold plating over min. 1.4um Nickle plating
- 2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickle plating
- 3 Mechanical
- 1)Total stroke : 1.3mm
- 2)Durability: 10,000 cycle min.
- 4 Electrical
- 1)Contact resistance: 30mOhm Max.
- 2)Operating voltage: 36VDC

USED ON

-

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED				MATL	1	HT TR	-	FIN	-
0	= ± -	DWN		APVD					
0.0	= ±0.15	CHK		REL					
0.00	= ± 0.10								
0.000	= ±								
ANGLE: ±1°				NAME	POGO PIN				
SURF TEXTURE: 32/				SCALE	A4	DWG	NO.	C-101198	
REMOVE BURRS, BREAK				1:1					
SHARP EDGES R0.05 MAX									
DO NOT SCALE PRINT									

Top-Link
Electronics Ltd.

PART NUMBER

101198-1

NEW		DATE
REVISION	APVD	
RECORD		
L TR		

LDC
-
DIST
-