



DWG NO. C-101209

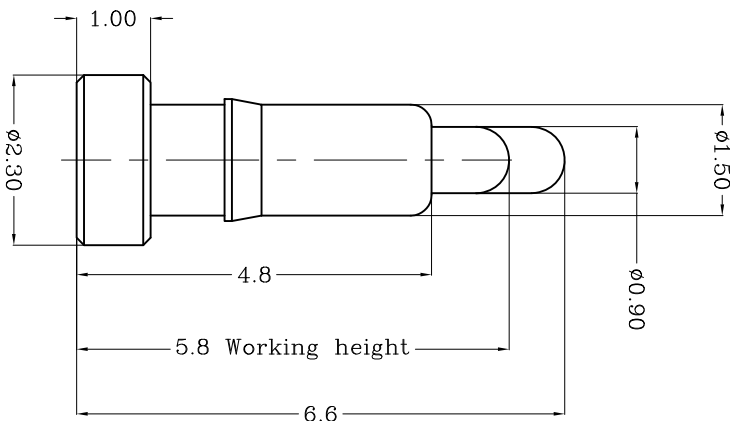

TOP-LINK

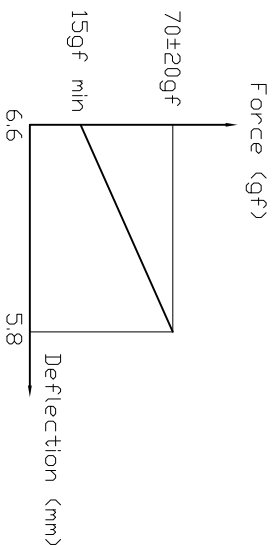

Material: Δ

or CuZn₃₉ PB3 or CuZn₃₈ PB2.

2) Spring : Stainless steel wire

2 Plating

1)Body: Min 0.1um Gold plating over min. 1.4um Nickle plating

2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickle plating

3 Mechanical

1) Total stroke : 1.5mm

	NEW		2008/05/23
LTR	REVISION RECORD	APVD	DATE

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED		MATERIAL		HT TR		FIN	
0 = $\pm$ -		DWN		APVD		Top-Link	
0.0 = ± 0.15		Qlin		Lensing		Top-Link	
0.00 = ± 0.10		CHK		REL		Electronics L.td.	
0.000 = $\pm$		Jlin					
ANGLE: $\pm 1^\circ$							
SURF. TEXTURE: $32/\sqrt{}$		NAME PGD PIN Customer Drawing					
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX		PG-2.3-1.0-1.5-4.8-6.6					
DO NOT SCALE PRINT		SCALE		DWG NO.		SHEET	
		1:1		A4		1 OF 1	
				C-101209		REV A	

101209-1
PART NUMBER

USED ON

1