




THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
C-101217

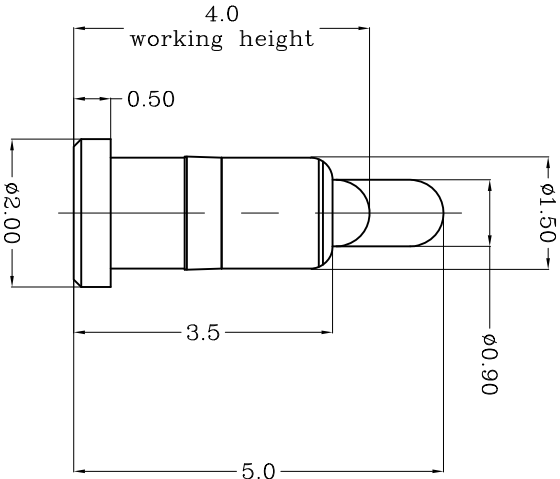

TOP-LINK

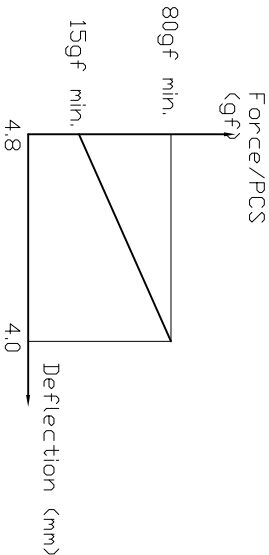

Notes:

Material:

1)Plunger & Body : CuZn36 Pb3, H02 (C36000)
or CuZn39 PB3 or CuZn38, PB2 or CuZn36(C2700).

2)Spring : Stainless steel wire

2)Plating

1)Body: 0.1um Gold plating over min. 1.4um Nickle plating

2)Plunger: 0.4um Gold plating over min. 1.4um Nickle plating

3)Mechanical

1)Total stroke : 1.4mm

2)Durability: 10,000 cycle min.

4)Electrical

1)Contact resistance: 30mOhm Max.

2)Operating voltage: 36VDC

LDC
-
DIST
-

new			08/03/28
REVISION	APVD	DATE	
RECORD			
LTR			

DIMENSIONS IN MM				TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±	-		0.0	= ±0.15		
0.00	= ±	0.10		0.000	= ±		
ANGLE: ±1°							
32/							
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX							
DD NOT SCALE PRINT							
MATL	1	HT TR	-	FIN	-	V	
DWN		APVD	Lansing				
CHK		REL					
Andy							
NAME							
PGGD PIN							
PG-2.0-0.5-1.5-3.5-5.0							
SCALE	1:1	A4	DWG NO.	C-101217	SHEET	1 OF 1	REV A

PART NUMBER

101217-1

USED ON

-