


USED ON
-

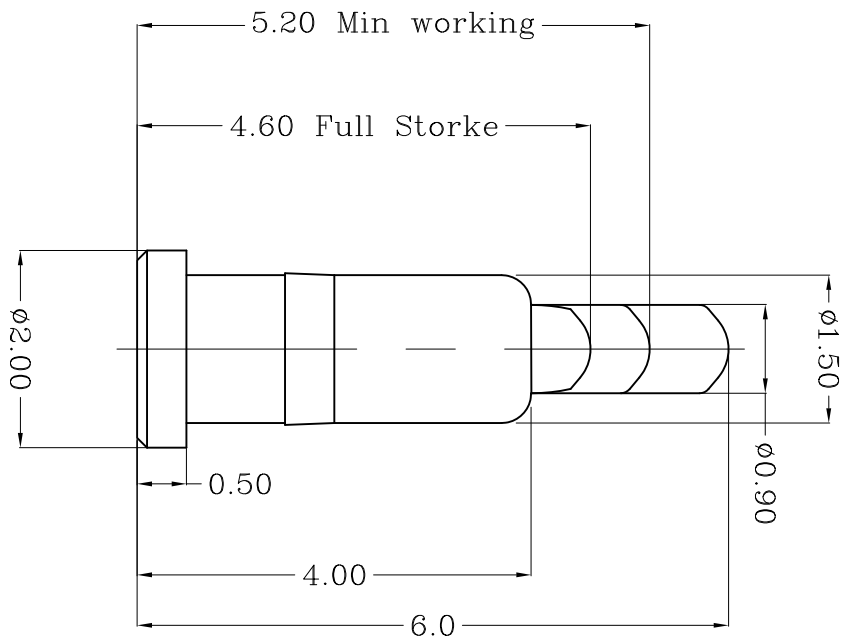

Notes:

1 Material(材质):

1)Body : Brass

2)Plunge : Brass

3)Spring : Stainless steel wire

2 Plating(电镀):

1)Body: Min. 1.1um Gold plating over min. 1.4um Nickel plating

(Body: 镀金1.1um 镍底1.4um Min)

2)Plunger: Min. 0.4um Gold plating over min. 1.4um Nickel plating

(Plunger: 镀金0.4um 镍底1.4um Min)

3 Mechanical(机械性能):

1)Force: 6.5±2.5gf per pin at 0.8mm stroke

(力: 下压0.8mm 的力: 6.5±2.5gf)

2)Total stroke(总行程) : 1.50mm

3)Durability(寿命): 10,000 cycle min.

4 Electrical(电气性能):

1)Contact resistance(接触阻抗): 30mOhm Max.

2)Voltage rating(额定电压): 36V DC Max

3)Current rating(额定电流): 2.0A

LDC	-
DIST	-

	NEW		8006/07/21
LTR	REVISION RECORD	APVD	DATE

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±		
0.0	= ±0.15		
0.00	= ±0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 3.2/ A			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
MATL	HT TR		FIN
	—		— A
DWN	APVD	<i>Top-Link Electronics</i> Top-Link Electronics Ltd.	
Aln	Lansing		
CHK	REL		
Jlm			
NAME PGGD PIN			
PG-2.0-0.5-1.5-4.0-6.0			
SCALE	DWG NO.	SHEET	REV
1:1	A4	1 OF 1	A1
C-101246			

101246-1
PART NUMBER

4

3

2

1