
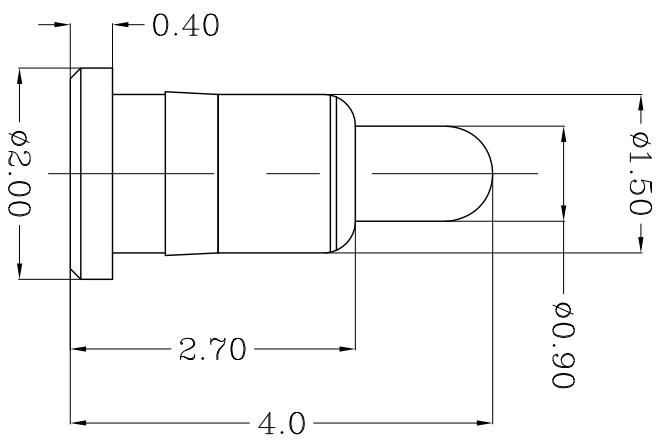




Notes:
△ Material(材质):

- 1)Body : Brass
- 2)Plunge : Brass
- 3)Spring : Stainless steel wire
- 2 Plating(电镀):
 - 1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um 镍底1.4um Min)
 - 2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um 镍底1.4um Min)
 - 3 Mechanical(机械性能):
 - 1)Force: Min 85gf per pin at 0.80mm stroke (力: 下压0.80mm 力: 85±20gf)
 - 2)Total stroke(总行程) : 1.00mm
 - 3)Durability(寿命): 10,000 cycle min.
 - 4 Electrical(电性能):
 - 1)Contact resistance(接触阻抗): 30mOhm Max.
 - 2)Voltage rating(额定电压): 36V DC Max
 - 3)Current rating(额定电流): 3.0A

TOP LINK

LDC
-
DIST
-

	更新		2013/01/11	DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED 0 = ± - 0.0 = ±0.15 0.00 = ±0.10 0.000 = ± ANGLE: ±1° SURF TEXTURE: 32/ REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT	MATL	△1	HT TR	FIN	✓	
	更新		2011/03/07		DWN	APVD	Top-Link Electronics			
					Qin	REL	Top-Link Electronics L td.			
	NEW		2008/10/13		CHK					
				NAME	PGGD PIN PG-2.0-0.4-1.5-2.7-4.0					
LTR	REVISION RECORD	APVD	DATE	SCALE	1:1	A4	DWG NO.	C-101277	SHEET 1 OF 1	REV A2

USED ON