


DWG NO.
C-101282


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

USED ON

—

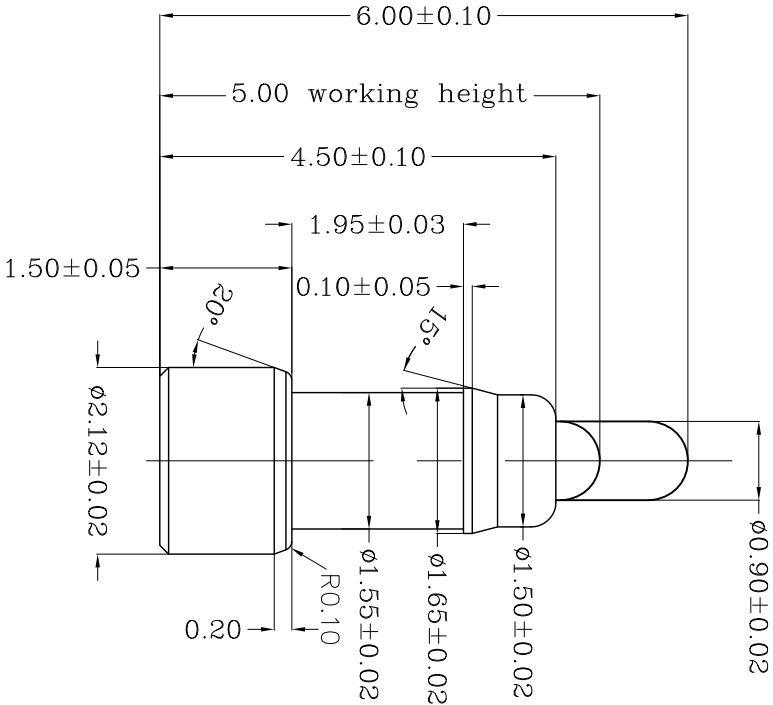

TOP-LINK

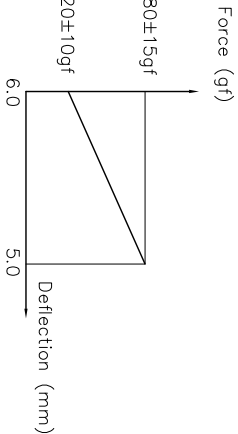

Notes:
Material:

- 1)Body : CuZn36 Pb3 (C36000)
- 2)Plunger: CuZn36,PB3(C36000) or CuZn30 or CuZn35
- 3)Spring : Stainless steel wire
- 4)Plating
- 5)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
- 6)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
- 7)Total stroke : 1.4mm
- 8)Durability: Min 1000 Cycle
- 9)Electrical
- 10)Contact resistance:20 mOhm max at working height after 5 cycles

LOC	-
DIST	-

	更新图画		2009/10/09
	更新图画		2009/05/21
	NEW		2008/10/17
LTR	REVISION RECORD	APVD	DATE

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED
0 = ±
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±
ANGLE: ±1°
SURF TEXTURE: 3.2/
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT

MATL	1	HT TR	—	FIN	—	✓
DWN	Qin	APVD	Lonsing	Top-Link Electronics	Top-Link Electronics Ltd.	
CHK	Leo	REL				
NAME	POGO PIN					
SCALE	1:1	A4	DWG NO.	C-101282	SHEET	1 OF 1
REV	B1					

101282-1
PART NUMBER