



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.




DWG NO.
C-101325

LDC
-
DIST
-

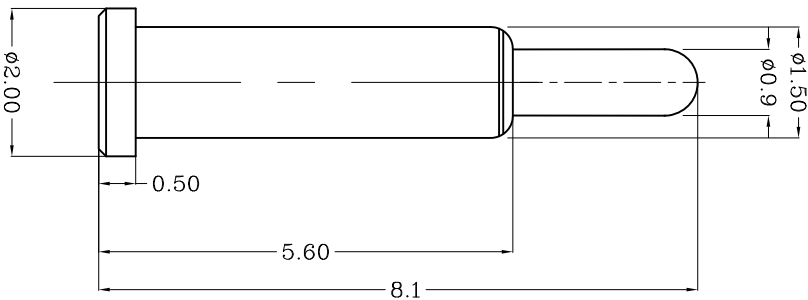

TOP-LINK

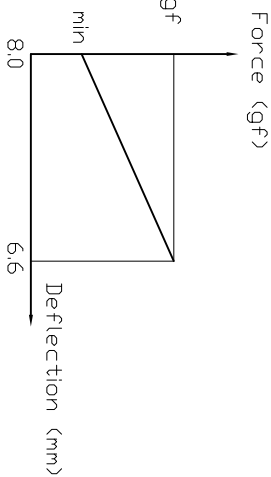

- Notes:
- Material:
1)Plunger & Body : CuZn36 Pb3, H02 (C36000)
or CuZn39 PB3 or CuZn38 PB2.
2)Spring : Stainless steel wire
- 2 Plating
1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
- 3 Mechanical
1)Total stroke : 2.3mm
2)Durability: 10,000 cycle min.
- 4 Electrical
1)Contact resistance: 30mOhm Max.
2)Operating voltage: 36VDC

USED ON

-

DIMENSIONS IN MM			
TOLERANCES UNLESS OTHER SPECIFIED			
0	= ± -		
0.0	= ±0.15		
0.00	= ± 0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
MATL	1	HT TR	FIN
DWN		APVD	Lansing
CHK		REL	
Andy			
NAME			
PGGD PIN			
PG-2.0-0.5-1.5-5.6-8.1			
SCALE	A4	DWG NO.	C-101325
1:1			
SHEET 1 OF 1			
REV A			

101325-1
PART NUMBER

Top-Link
Electronics Ltd.