



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
101455

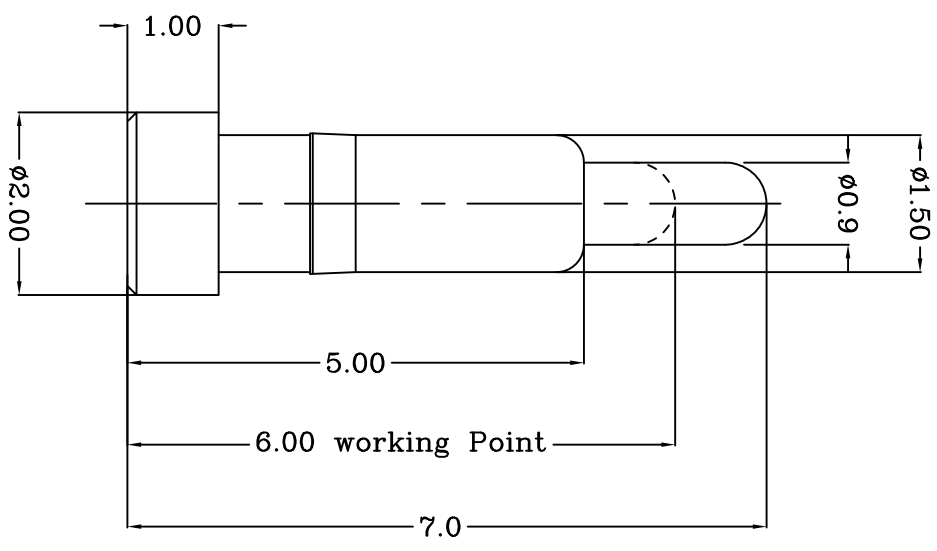

Notes:
1) Material(材质):
Contact: C36000 & C27000
Spring : Stainless steel wire

2) Plating:

1) Body: Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镍底1.4um Min)
2) Fingers: Min 0.4um Gold plating over min. 2.5um Nickel plating (Fingers: 镀金0.4um Min 镍底2.5um Min)

3) Mechanical:

Force: Min 15gf per pin at 0.3mm stroke
75±25gf per pin at 1.0mm stroke
Total stroke(总行程): 1.90mm
Durability(寿命): 10,000 cycle min.
Electrical(电性能)

Contact resistance(接触抵抗): 30mOhm Max.
Voltage rating(额定电压): 36V DC Max
Current rating(额定电流): 2.0A

TOP LINK

USED ON
-

101455-1
PART NUMBER

DIMENSIONS IN MM			
TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±-		
0.0	= ±0.15		
0.00	= ±0.10		
0.000	= ±-		
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			

NEW		8010/09/21	PGGD PIN PG-2.0-1.0-1.5-5.0-7.0			SHEET 1 OF 1	REV A
REVISION RECORD	APVD	DATE					
LTR			SCALE 1:1	A4	DWG NO. C-101455		

LDC	-
DIST	-

4 3 2 1