



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
C-101476

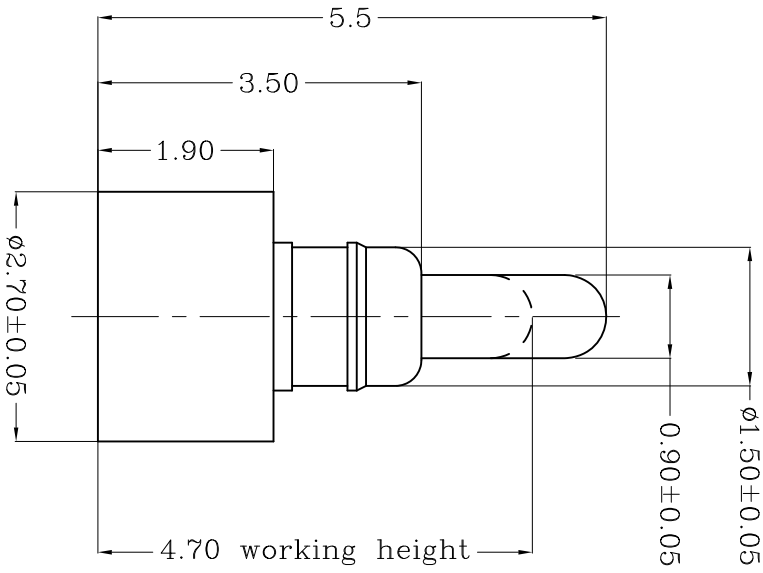

TOP-LINK

Notes:
Material(材质):

- 1) Body: Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镍底1.4um Min)
- 2) Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镍底1.4um Min)
- 3) Mechanical(机械性能):
(力: 下压0.8mm的力:125±25gf)
(力: 下压0.8mm的力:125±25gf)
Force:125±25gf per pin at 0.8mm stroke
2) Total stroke(总行程) : 1.20mm
3) Durability(寿命): 10,000 cycle min.
(Contact resistance(接触阻抗): 30mOhm Max.
2) Voltage rating(额定电压): 36V DC Max
(Current rating(额定电流): 2.0A

USED ON

101476-1

PART NUMBER

Top-Link
Electronics Ltd.

DIMENSIONS IN MM		TOLERANCES UNLESS		OTHER SPECIFIED	
0	= ±	0.0	= ±0.15	0.00	= ±0.10
0.000	= ±	ANGLE: ±1°			
SURF TEXTURE: 3.2/		REMOVE BURRS, BREAK		SHARP EDGES R0.05 MAX	
DO NOT SCALE PRINT					

MATL	HT TR	FIN	PQGD PIN PG-2-7-1-9-1-5-3-5-5-5		
DWN	APVD	REL	SCALE	A4	DWG
CHK			1:1		NO.
			C-101476		
			SHEET 1 OF 1		
			REV A		

4

3

2

1